


Specification	Aluminium air termination mast with 8-leg support QR system made of stainless steel. With 8 threaded stainless steel pieces. Height of the air termination mast: 14,0m. Weight: 95 kg For wind speed zones III – IV For ground category III- IV (max. gust speed 175 km/h)
Article No.	QR 00 26

Customs tariff No.: 85389099



**The mast can be set up
with 4 persons by means of
a rope WITHOUT a crane!**

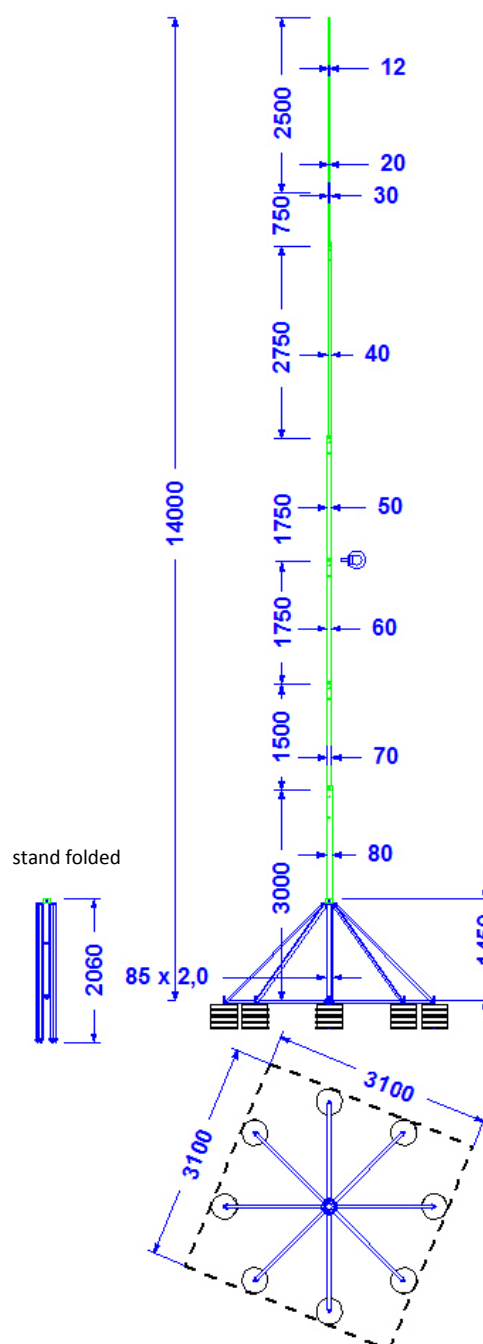

Description	Ø	Material	Length	Wind speed zone	Remarks
Mast main tube 1	85,0mm x 2,0mm	Aluminium tube	3,00m	Wind speed zone III-IV (accord. to Euro Code 1 as well as DIN EN 1991 and DIN EN 1993. At 1,5-fold safety). Max. gust speed 175 km/h. Applicable for building heights below 40m and area heights below 600m above NN. Higher buildings or areas as well as icing and self-oscillation are to be considered separately if necessary.	1. All connections are made of stainless steel V2A. 2. The concrete bases and the respective protective pads are not part of the product. 3. System-weight including the concrete bases: 639 kg. 4. Surface loading rate: 66,5 kg/m² 5. Inclination adjustment till 5 degree possible. 6. Pack size: 3000 mm long and 200 mm Ø, weight: 95 kg. 7. Weight of the mast 28,5 kg. 8. Weight of the stand 57 kg.
Mast main tube 2	70,0mm x 5,0mm	Aluminium tube	1,50m		
Mast main tube 3	60,0mm x 5,0mm	Aluminium tube	1,75m		
Mast main tube 4	50,0mm x 5,0mm	Aluminium tube	1,75m		
Mast main tube 5	40,0mm x 5,0mm	Aluminium tube	2,75m		
Mast main tube 6	30,0mm x 5,0mm	Aluminium tube	0,75m		
Mast tip	1,5m 20mm, 1m 12mm	Aluminium rods	2,50m		
Stand segments stainless steel		Support segments: 50x30x2,5mm Foot segments: 50x30x2,5mm	Support segments: 2000mm Foot segments: 1435mm		
Stand central tube	88,9mm x 1,5 mm	Stainless steel tube V2A	1450 mm		