


<b>Specification</b>	Aluminum air termination mast with welded 6-leg stainl. steel stand for 6 concrete bases 17 kg. Height of the air termination mast: 5,0m. Weight: 13,4 kg <b>Calculated for wind speed zones I – VI For ground category III - IV</b>
<b>Article No.</b>	<b>48 53 80</b>

Customs tariff No.:  
85389099

RoHS2 (Guideline 2011/65/EU) and REACH (Regulation (EG) No.1907/2006): The substance-requirements and all other requirements of these regulations are observed by this product.

The concrete bases and base plates are **NOT** part of the product.

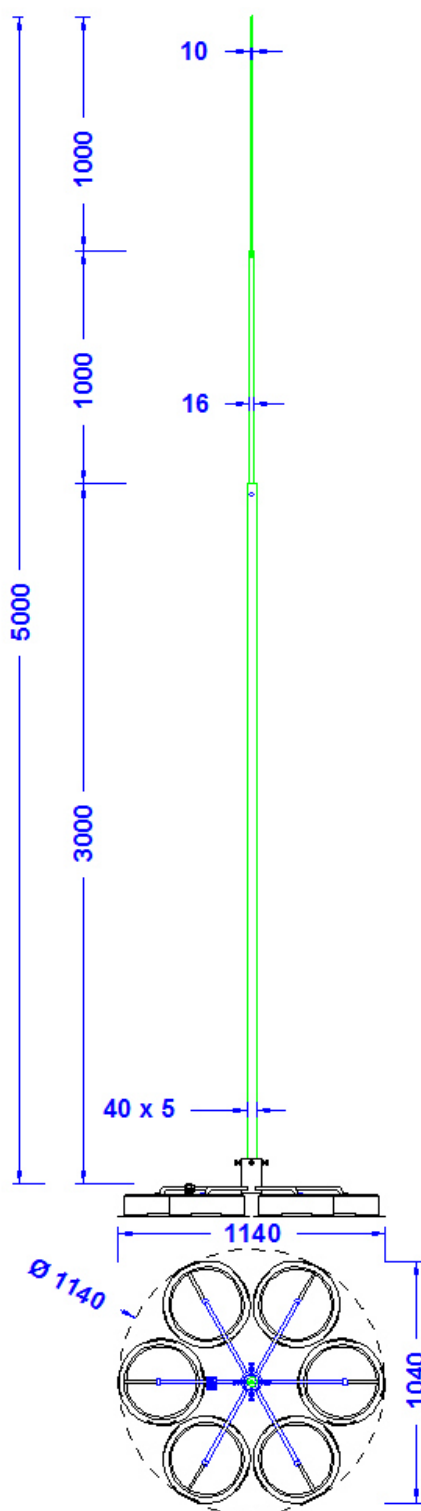

Description	Ø	Material	Length	Wind speed zone	Remarks
Mast main tube	40mm	Aluminum tube 40x5mm	3,0m	Wind speed zone I-VI for ground category III – IV (accord. to Euro Code 1 as well as DIN EN 1991 and DIN EN 1993. At 1,5-fold safety) Applicable for building heights below 40m und area heights below 600m above NN. Higher buildings or areas as well as icing and self-oscillation are to be considered separately if necessary.	<ol style="list-style-type: none"> <li>All connections are made of stainless steel V2A.</li> <li>The concrete bases and the respective protective pads are not part of the product.</li> <li>System-weight including the concrete bases: 114 kg.</li> <li>Surface loading rate: 95 kg/m<sup>2</sup></li> </ol>
Mast tip	1m 16mm, 1m 10mm	Aluminum rods	2 x 1m		
Stand segments		Rods 16mm Ø galvanized steel			
Stand central tube	88,9 mm	Tube 88,9x5,0mm galvanized steel	135mm		