
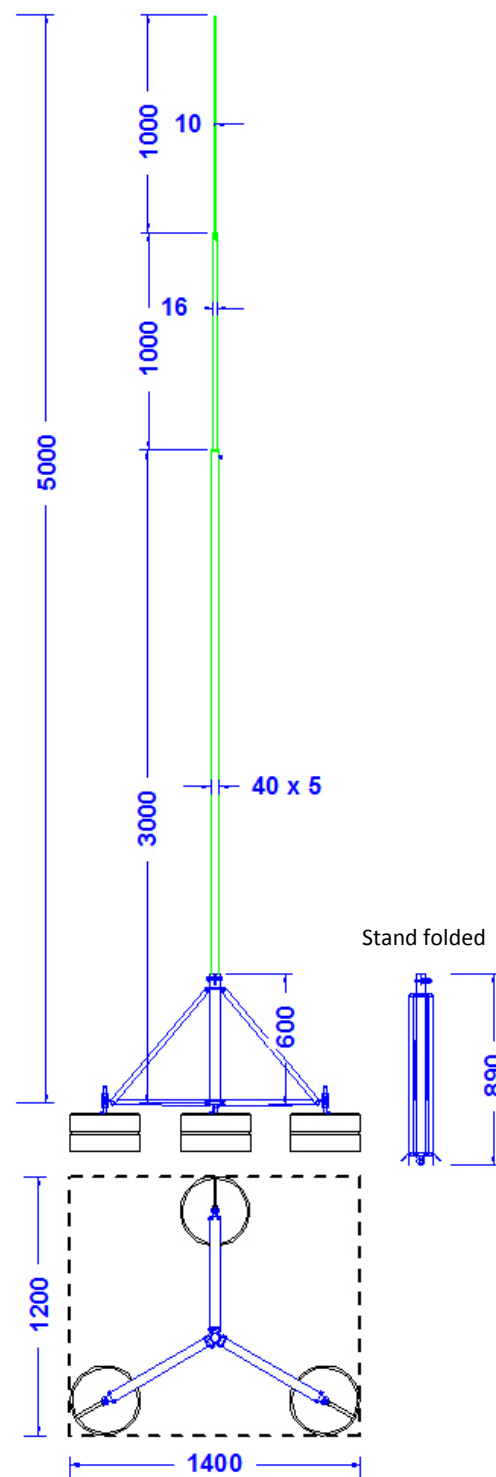


<b>Specification</b>	Aluminum air termination mast with 3- leg folding support made of stainl. steel and 3 threaded pieces made of stainl. steel to be fixed on concrete bases. Height of the air termination mast: 5,0m. Weight: 13,5 kg <b>For wind speed zones I – II</b> <b>For ground category III- IV</b> <b>(max. gust speed 145 km/h)</b>
<b>Article No.</b>	<b>48 45 19</b>

Customs tariff No.: 85389099

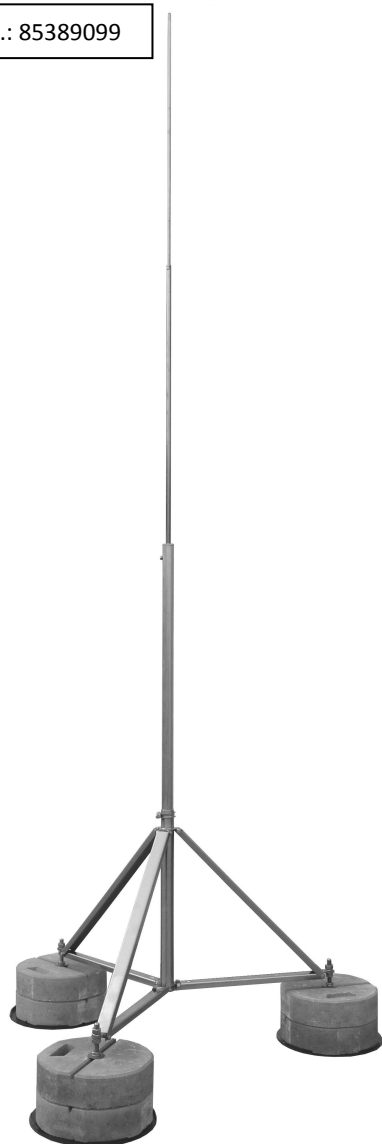

Description	Ø	Material	Lenght	Wind speed zone	Remarks
<b>Mast main tube</b>	40mm	Aluminum tube ALMGSI0,5	3,0m	Wind speed zone I-II (accord. to Euro Code 1 as well as DIN EN 1991 and DIN EN 1993. At 1,5-fold safety). Max. gust speed 145 km/h. Applicable for building heights below 40m and area heights below 600m above NN. Higher buildings or areas as well as icing and self-oscillation are to be considered separately if necessary.	1. All connections are made of stainless steel 1.4301. 2. The concrete bases and the respective protective pads are not part of the product. 3. System-weight including the concrete bases: 116 kg. 4. Surface loading rate: 69 kg/m² 5. Subject to technical modifications.
<b>Mast tip</b>	16mm + 10mm	Aluminum rods ALMGSI0,5	1 x 1,0m 1 x 1,0m		
<b>Stand segments</b>		Stainless steel 1.4301			
<b>Stand central tube</b>	45,0mm	Stainless steel 1.4301, 45,0mm Ø	600 mm		
<b>Threaded rods for concrete bases</b>	16mm	Stainless steel 1.4301	340 mm		