


Specification	Aluminum air termination mast with 4- leg support QR-System out of stainless steel and 4 threaded pieces out of stainless steel for the concrete bases. Height of the mast: 7,0m. Weight: 19,5 kg; System-weight: 156 kg For wind speed zones I – II For ground category III- IV (max. gust speed 145 km/h)
Article No.	QR 00 31

Customs tariff No.: 85389099

**The concrete bases and
the protective plates are
not part of the product.**

Transport length: 3m

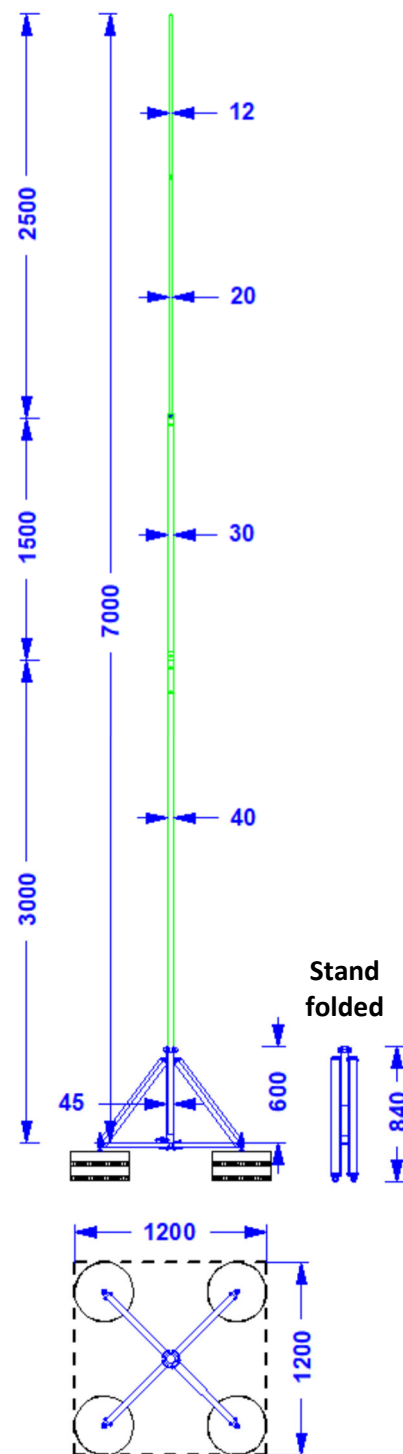

Description	Ø	Material	Lenght	Wind speed zone	Remarks
Mast main tube 1	30mm	Aluminium tube	1,5m	Wind speed zone I-II (accord. to Euro Code 1 as well as DIN EN 1991 and DIN EN 1993. At 1,5-fold safety). Max. gust speed 145 km/h. Applicable for building heights below 40m and area heights below 600m above NN. Higher buildings or areas as well as icing and self-oscillation are to be considered separately if necessary.	<ol style="list-style-type: none"> All connections are made of stainless steel. The concrete bases and the respective protective pads are not part of the product. System-weight including the concrete bases: 156 kg. Surface loading rate: 108 kg/m² Subject to technical modifications.
Mast main tube 2	40 mm	Aluminium tube	3,0m		
Mast tip	20mm + 12mm	Aluminium rods	1 x 1,5m 1 x 1,0m		
Stand segments		Stainless steel 1.4301			
Stand central tube	45,0mm	Stainless steel tube 1.4301	600 mm		
Threaded pieces for concrete bases	16mm	Stainless steel 1.4301	340 mm		