


Specification	Aluminium air termination mast with welded 8- legged support made of galvanized steel for eight concrete bases 17 kg. Height of the air termination mast: 7,5m. Weight: 19,5 Kg; System weight: 156 kg Calculated for wind speed zones I – II For ground category III - IV (max. gust speed: 145 km/h)
Article No.	48 54 07

Custom tariff no.:
85389099

RoHS 2 (Directive 2011/65/EU) and REACH (Regulation (EC) No. 1907/2006):
This product complies with the substance requirements and other provisions of these regulations.

The concrete bases and the protective plates are not part of the product.

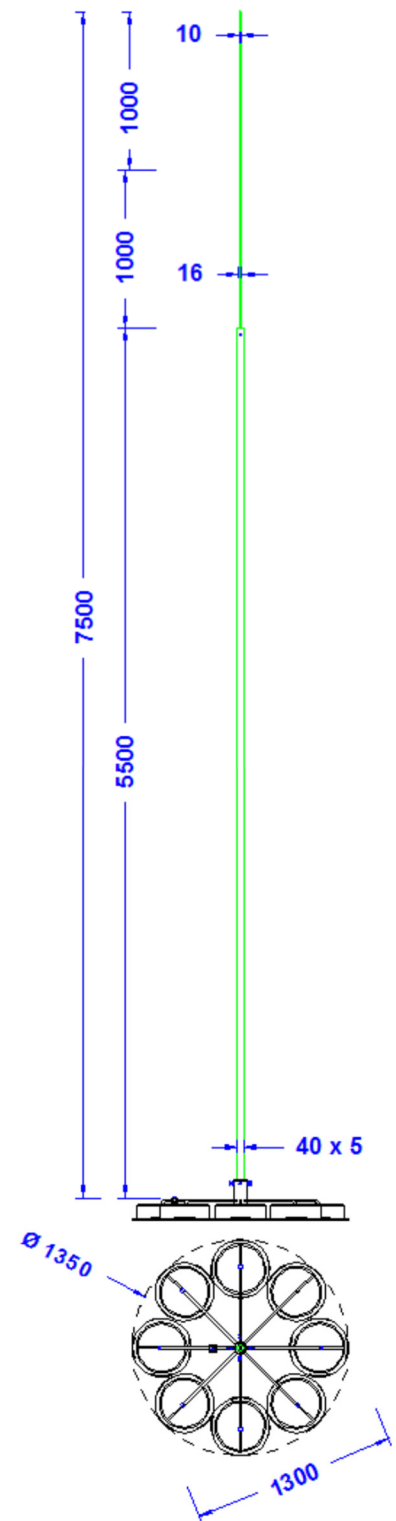

Description	Ø	Material	Length	Wind speed zone	Remarks
Mast main tube	40mm	Aluminium tube	5,5m	Wind speed zone I-II (accord. to DIN1055; 4131; 18800. At 1,5-fold safety) Applicable for building heights below 40m und area heights below 600m above NN. Higher buildings or areas as well as icing and self-oscillation are to be considered separately if necessary.	<ol style="list-style-type: none"> All connections are made of stainless steel. The concrete bases and the respective protective pads are not part of the product. System-weight including the concrete bases: 156 kg. Surface loading rate: 99,5 kg/m² Connection clamp 8-10mm made of stainless steel. Technical changes reserved.
Mast tip	1m 16mm, 1m 10mm	Aluminium rods	2 x 1m		
Support segments		Hot-Dip galvanized Steel			
Support Central tube	88,9 mm	Hot-Dip galvanized Steel	135mm		