

Specification	Aluminum air termination mast multi part with 6- leg support QR-System out of stainless steel and 6 threaded pieces out of stainless steel for the concrete bases. Height of the mast: 8,0m. Weight: 26,0 kg System-weight: 228 kg For wind speed zones I – II For ground category III- IV (max. gust speed 145 km/h)
Article No.	QR 00 35


Customs tariff No.: 85389099

**The concrete bases and
the protective plates are
not part of the product.**

Transport length: 3m



**The mast can be set up
with 1 person by means of
a rope WITHOUT a crane!**

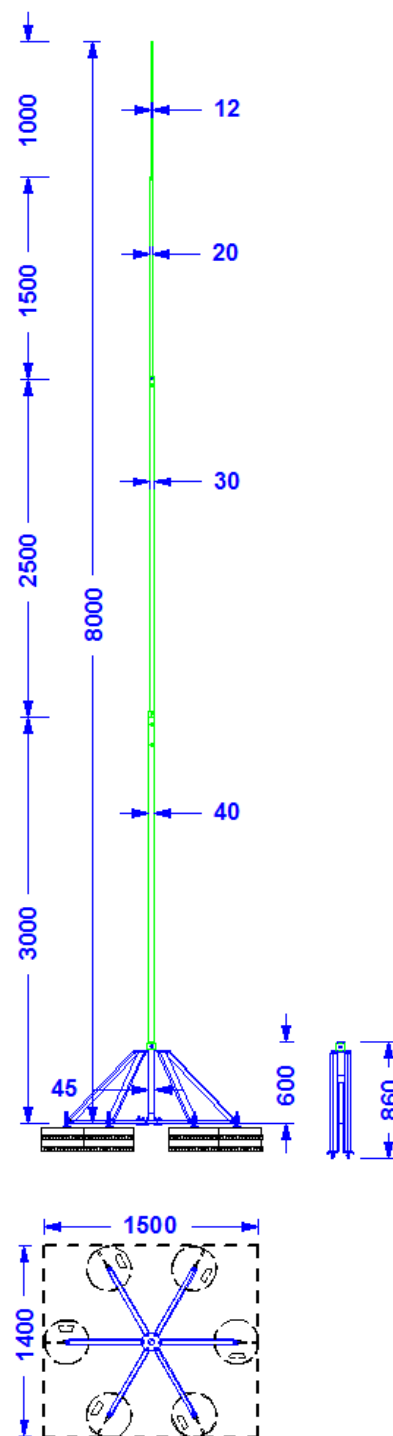

Description	Ø	Material	Length	Wind speed zone	Remarks
Mast main tube 1	40mm	Aluminium tube	3,0m	Wind speed zone I-II (accord. to Euro Code 1 as well as DIN EN 1991 and DIN EN 1993. At 1,5-fold safety). Max. gust speed 145 km/h. Applicable for building heights below 40m and area heights below 600m above NN. Higher buildings or areas as well as icing and self-oscillation are to be considered separately if necessary.	1. All connections are made of stainless steel. 2. The concrete bases and the respective protective pads are not part of the product. 3. System-weight including the concrete bases: 228kg. 4. Surface loading rate: 109 kg/m ² 5. Subject to technical modifications
Mast main tube 2	30mm	Aluminium tube	2,5m		
Mast tip	20mm + 12mm	Aluminium rods	1 x 1,5m 1 x 1,0m		
Stand segments		Stainless steel 1.4301			
Stand central tube	45,0mm	Stainless steel tube 1.4301	600 mm		
Threaded pieces for concrete bases	16mm	Stainless steel 1.4301	340 mm		