

Specification	Aluminum air termination mast multi part with 6- leg support QR-System out of stainless steel and 6 threaded pieces out of stainless steel for the concrete bases. Height of the mast: 8,5m. Weight:26,0 kg System-weight: 230 kg For wind speed zones I – II For ground category III- IV (max. gust speed 145 km/h)
Article No.	QR 00 36


Customs tariff No.: 85389099

The concrete bases and the protective plates are not part of the product.

Transport length: 3m



The mast can be set up with 1 person by means of a rope WITHOUT a crane!

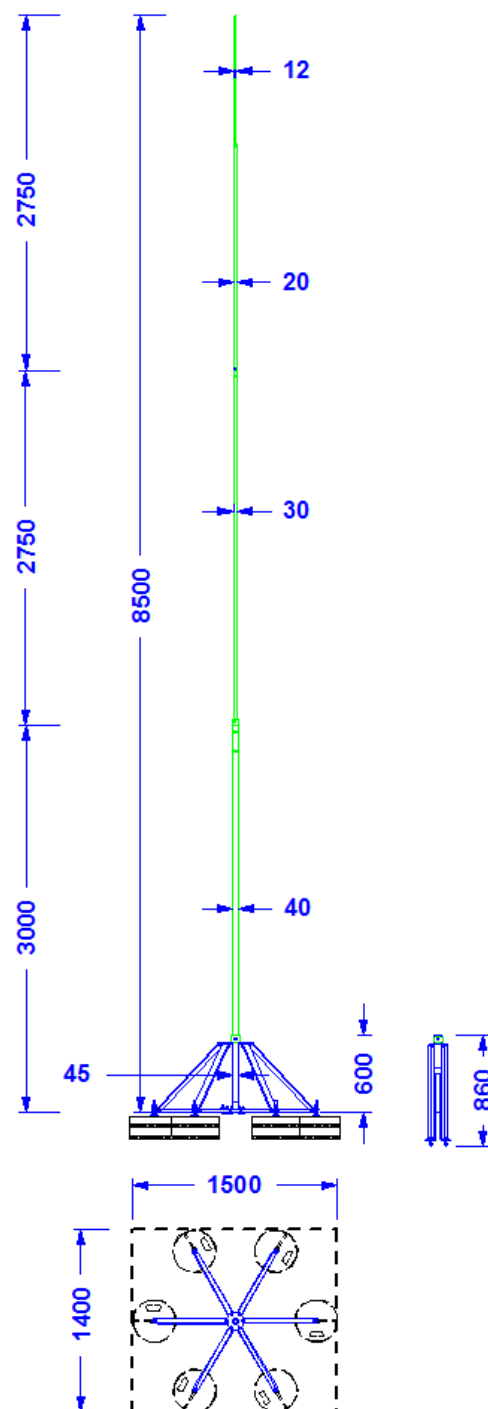

Description	Ø	Material	Length	Wind speed zone	Remarks
Mast main tube 1	40mm	Aluminium tube	3,0m	Wind speed zone I-II (accord. to Euro Code 1 as well as DIN EN 1991 and DIN EN 1993. At 1,5-fold safety). Max. gust speed 145 km/h. Applicable for building heights below 40m and area heights below 600m above NN. Higher buildings or areas as well as icing and self-oscillation are to be considered separately if necessary.	<ol style="list-style-type: none"> All connections are made of stainless steel. The concrete bases and the respective protective pads are not part of the product. System-weight including the concrete bases: 230kg. Surface loading rate: 109 kg/m² Subject to technical modifications
Mast main tube 2	30mm	Aluminium tube	2,75m		
Mast tip	20mm + 12mm	Aluminium rods	1 x 1,75m 1 x 1,0m		
Stand segments		Stainless steel 1.4301			
Stand central tube	45,0mm	Stainless steel tube 1.4301	600 mm		
Threaded pieces for concrete bases	16mm	Stainless steel 1.4301	340 mm		