


<b>Specification</b>	Teleskop air termination mast with 3- leg support QR System made of stainl. steel. With 3 threaded pieces made of stainl. steel. Height of the mast: 6,0m. Weight: 19 kg, Systemweight: 121 kg For wind speed zone I – II For ground category III- IV (max. gust speed 145 km/h)
<b>Article No.</b>	<b>84 11 12</b>

Customs tariff No.: 85389099

**The concrete bases and  
the protective plates are  
not part of the product.**

**Transport length: 2,3m**

**The mast can be erected  
with 1 person  
WITHOUT a crane !**

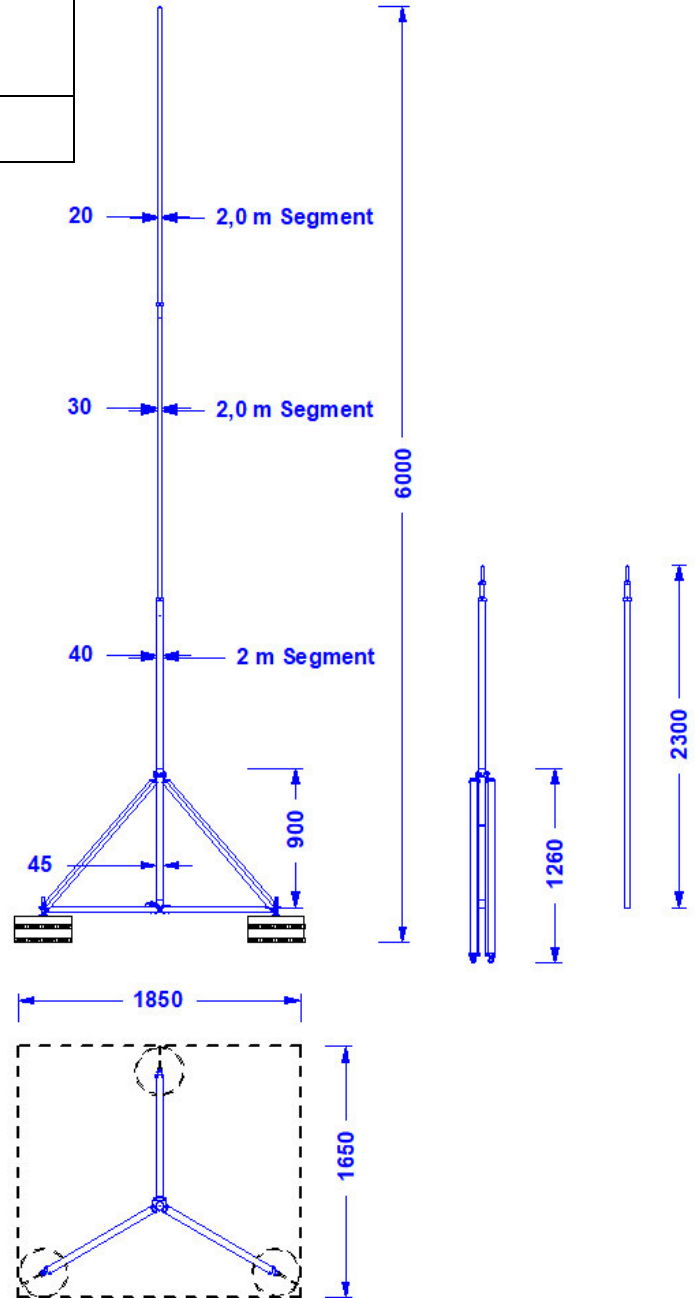

Description	Ø	Material	Length	Wind speed zone	Remarks
Mast main tube 1	40,0mm	Stainless steel tube	2,00m	Wind speed zone I-II, ground category III-IV (accord. to Euro Code 1 as well as DIN EN 1991 and DIN EN 1993. At 1,5-fold safety). Max. gust speed 145 km/h. Applicable for building heights below 40m and area heights below 600m above NN. Higher buildings or areas as well as icing and self-oscillation are to be considered. separately if necessary.	1. All connections are made of stainless steel V2A.
Mast main tube 2	30,0mm	Stainless steel tube	2,00m		2. The concrete bases and the respective protective pads are not part of the product.
Mast tip	20,0mm	Stainless steel rod	2,00m		3. System-weight including the concrete bases: 121 kg.
Stand segments		Stainless steel			4. Surface loading rate: 40 kg/m²
Stand central tube	45,0mm x 2,0 mm	Stainless steel 1.4301	900 mm		5. Counter overturning moment: 0,74 kNm.
					6. Pack size: 2300mm long and 70 mm Ø Weight: 24 kg.
					7. Weight of the mast 7,5 kg.
					8. Weight of the stand 9,5 kg.