


Specification	Aluminum air termination rod with welded galvanized steel tripod for three concrete bases 17 kg. Height of the air termination rod: 3,0m. Weight: 5,4 kg Calculated for wind speed zones I – II For ground category III - IV
Article No.	48 62 92

Customs tariff No.: 85389099



The concrete bases and the protective pads are not part of the product.

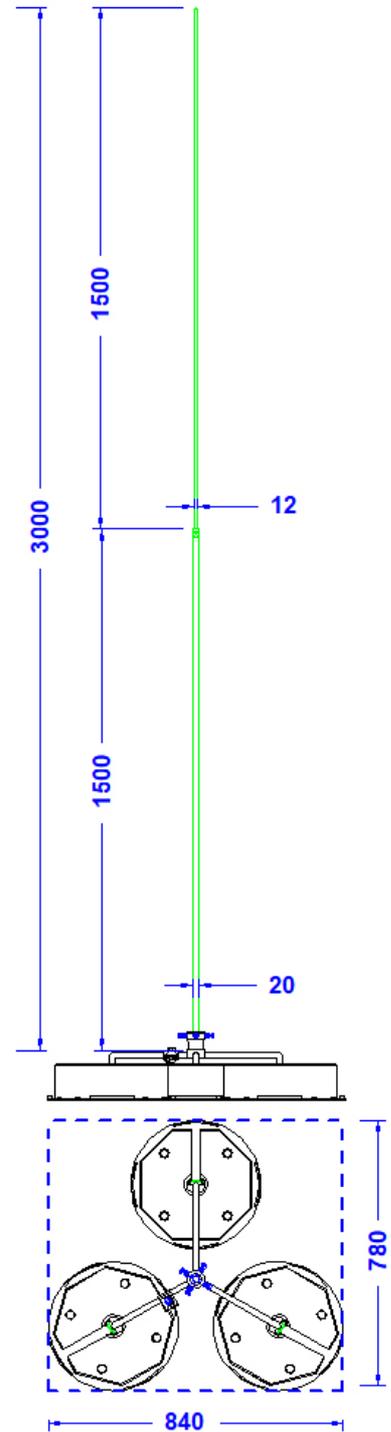

Description	Ø	Material	Length	Wind speed zone	Remarks
Air termination rod	1,5m 20mm 1,5m 12mm	Aluminium AlMgSi 0,5	3,0m	Wind speed zone I-IV for ground category III – IV (accord. to Euro Code 1 as well as DIN EN 1991 and DIN EN 1993. At 1,5-fold safety) with maximum gust velocity 145 km/h. Applicable for building heights below 40m und area heights below 600m above NN. Higher buildings or areas as well as icing and self-oscillation are to be considered separately if necessary.	<ol style="list-style-type: none"> All screw joints are made of stainless steel V2A. The concrete bases and the respective protective pads are not part of the product. System-weight including the concrete bases: 57 kg. Surface loading rate: 57 kg/m² Terminal clamp 8-10mm made of stainl.steel, attached. Technical changes reserved.
Stand segments		Steel round 16mm Ø, hot dip galvan.			
Stand central tube	50mm outer Ø for rods 16-22mm Ø	Galvanized steel with four stainl.steel adjustment screws	70mm		