
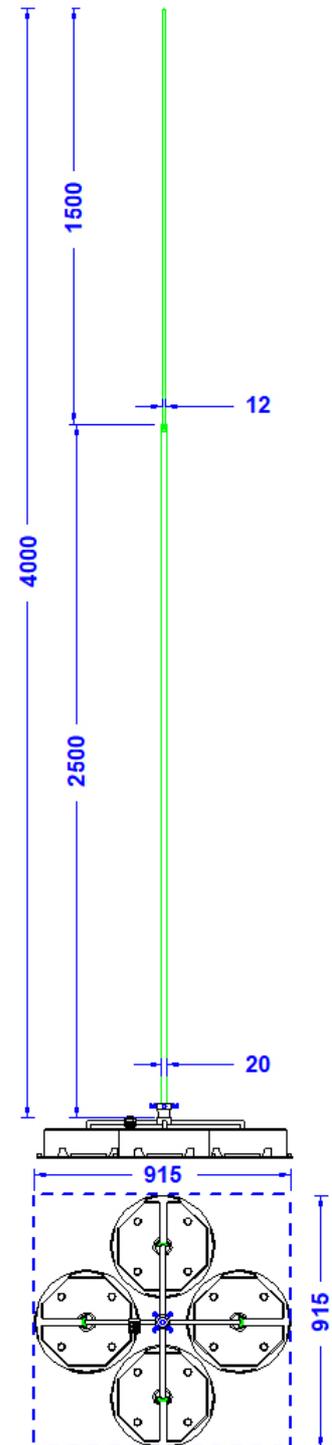


<b>Specification</b>	Aluminium air termination mast with welded 4-legged support made of galvanized steel for four concrete bases 17 kg. Height of the air termination mast: 4,0m. Weight: 6,8 kg <b>For wind speed zones I – VI</b> <b>For ground category III - IV</b>
<b>Article No.</b>	<b>48 63 24</b>

Customs tariff No.: 85389099

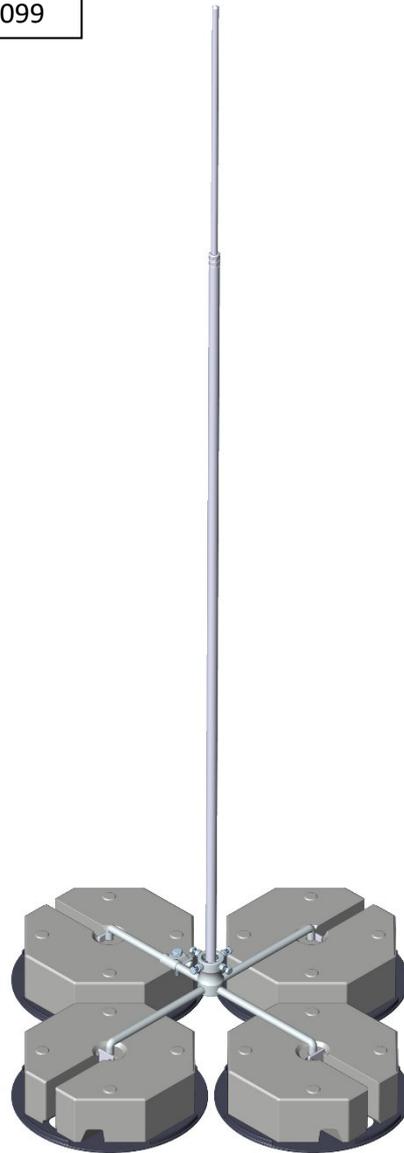

The concrete bases and the protective pads are not part of the product.

Description	Ø	Material	Lengt	Wind speed zone	Remarks
<b>Air termination rod</b>	2,5m 20mm 1,5m 12mm	Aluminium AlMgSi 0,5	4,0m	Wind speed zone I-VI for ground category III – IV (accord. to Euro Code 1 and DIN EN 1991 and DIN EN 1993. At 1,5-fold safety) with max. gust speed 145 km/h. Applicable for building heights below 40m und area heights below 600m above NN. Higher buildings or areas as well as icing and self-oscillation are to be considered separately if necessary.	<ol style="list-style-type: none"> <li>All connections are made of stainless steel V2A.</li> <li>The concrete bases and the respective protective pads are not part of the product.</li> <li>System-weight including the concrete bases: 75kg.</li> <li>Surface loading rate: 75 kg/m<sup>2</sup></li> <li>Connecting clamp 8-10mm stainless steel, attached.</li> <li>All connections stainless steel.</li> <li>Technical changes reserved.</li> </ol>
<b>Stand segments</b>		Steel round 16mm Ø, hot dip galv.			
<b>Stand Central tube</b>	50mm outside-Ø for rods 16-22mm Ø	Galvanized steel, with 4 stainless steel adjusting screws.	70mm		