



Specification	Aluminium air termination mast with welded 4-legged support made of galvanized steel for four concrete bases 17 kg. Height of the air termination mast: 4,5m. Weight: 6,5 kg For wind speed zones I – VI For ground category III - IV
Article No.	48 63 25

Customs tariff No.: 85389099

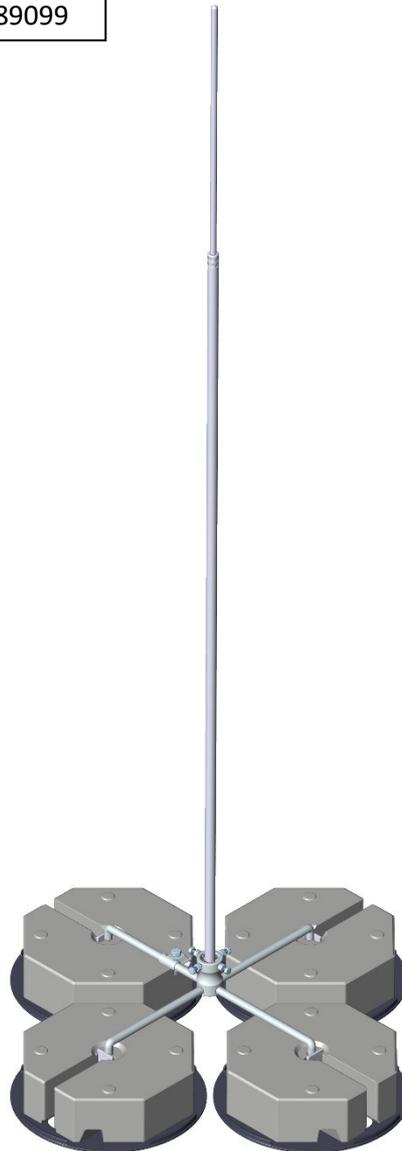

The concrete bases and the protective pads are not part of the product.

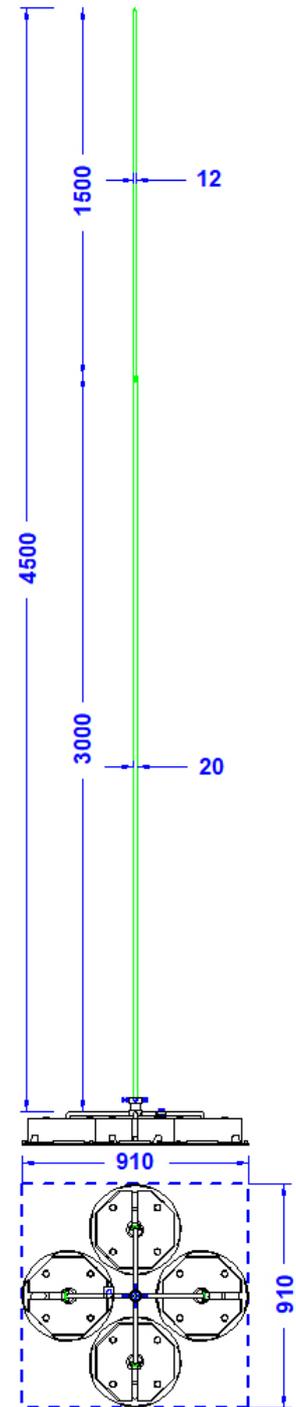

Description	Ø	Material	Length	Wind speed zone	Remarks
Air termination rod	3,0m 20mm 1,5m 12mm	Aluminium AlMgSi 0,5	4,5m	Wind speed zone I-VI for ground category III – IV (accord. to Euro Code 1 and DIN EN 1991 and DIN EN 1993. At 1,5-fold safety) with max. gust speed 145 km/h. Applicable for building heights below 40m und area heights below 600m above NN. Higher buildings or areas as well as icing and self-oscillation are to be considered separately if necessary.	<ol style="list-style-type: none"> All connections are made of stainless steel V2A. The concrete bases and the respective protective pads are not part of the product. System-weight including the concrete bases: 75kg. Surface loading rate: 75 kg/m² Connecting clamp 8-10mm stainless steel, attached. All connections stainless steel. Technical changes reserved.
Stand segments		Steel round 16mm Ø, hot dip galv.			
Stand Central tube	50mm outside-Ø for rods 16-22mm Ø	Galvanized steel, with 4 stainless steel adjusting screws.	70mm		