



Specification	Saddle roof support made of stainless steel with a 90 degree turned support for a lightning protection rod 16mm with any level adjustment, for tiled roofs. Reference Standard: DIN EN 62561-1 Weight: 730g
Article No.	48 60 12

Customs tariff No.: 85389099

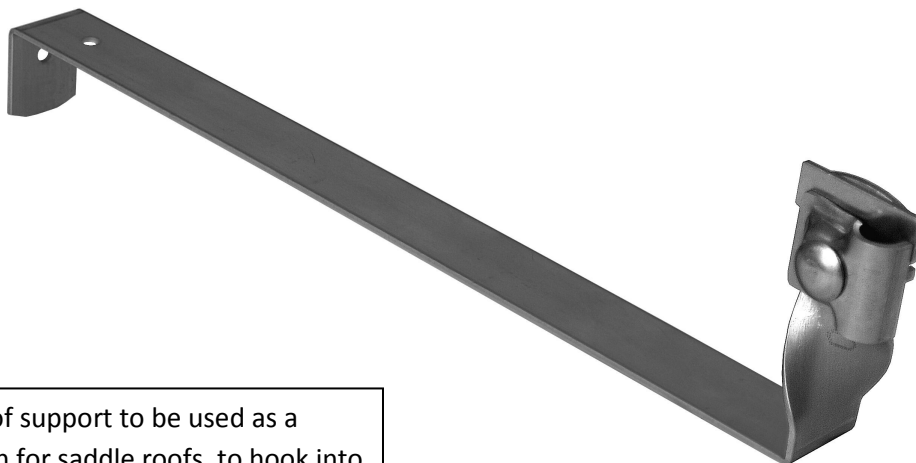

Saddle roof support to be used as a subduction for saddle roofs, to hook into the rafter.

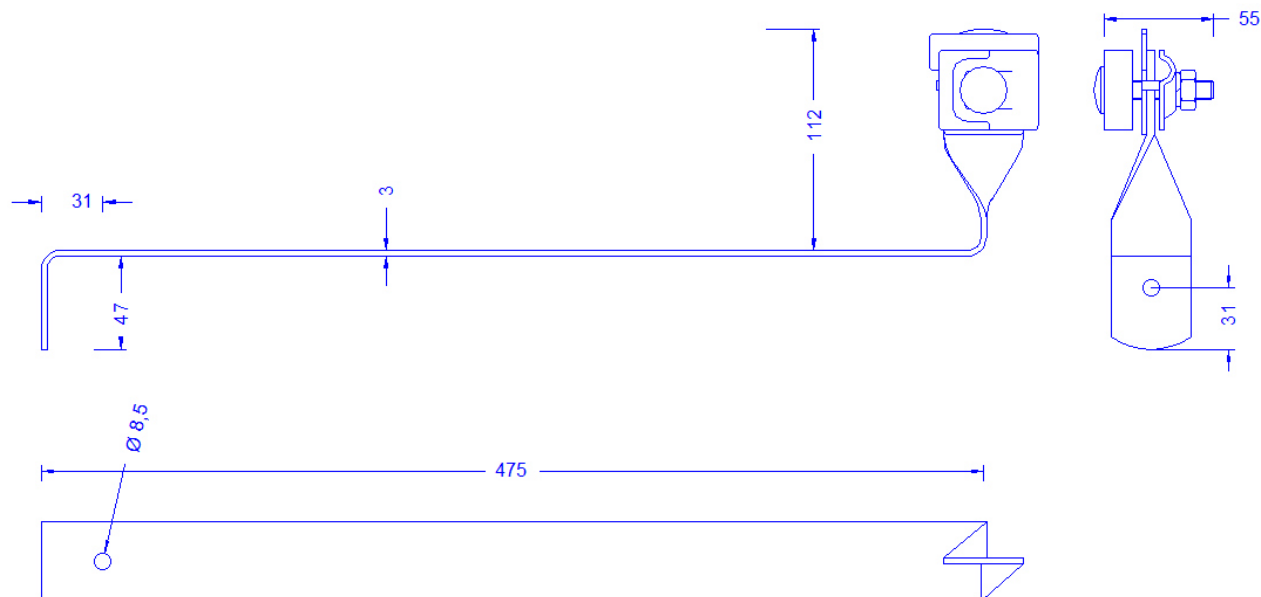

Description	RoHS2 (Guideline 2011/65/EU) and REACH (Regulation (EG) No.1907/2006): The substance-requirements and all other requirements of these regulations are observed by this product.
Clamps: Type and bolting (all stainless steel)	Universal clamp 16mm as support for a lightning protection rod; universal clamp 8-10mm as connection part for the arrestor. Carriage bolt M10x55 with nut and spring washer.
Material of the saddle roof support	Stainless steel strip 40x3mm.