

Descript. of the article	Insulating spacer 16mm 1200mm long with hinge mounting plate for wall fixation. With holder for 16mm rod. Weight:745g Standard ref.: DIN EN 62561-4
Article No.	69 11 06




Customs tariff No.: 85389099

Useful information regarding construction units with GRP-components:

Tests made by the company BASF have shown that construction units made of GRP – in contrast to thermoplastic compounds – are hardly impacted by UV-A respectively UV-B rays concerning their mechanical properties (no embrittlement respectively cracks).

Depending on the resin base as well as the type and quantity of the radiation a yellowing in the course of time is possible, which however has no influence on the quality of the material.

GRP is exceptionally weather-resistant. On average a removal of material due to weather of only 0,05 mm within ten years can be assumed.

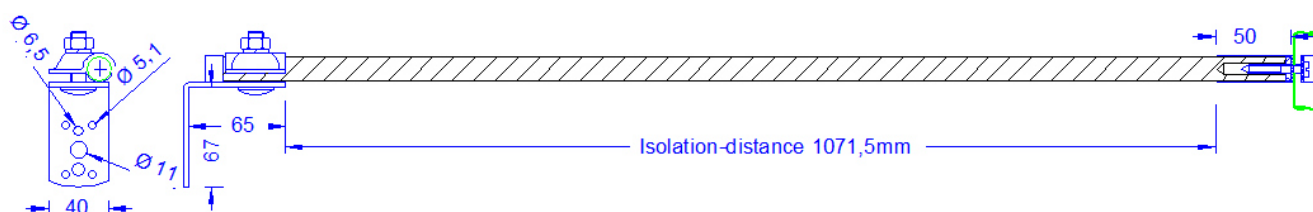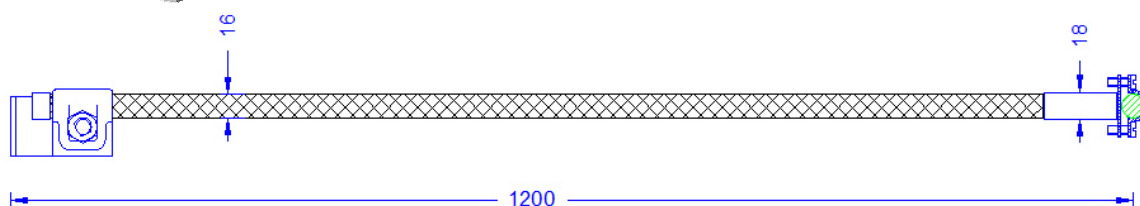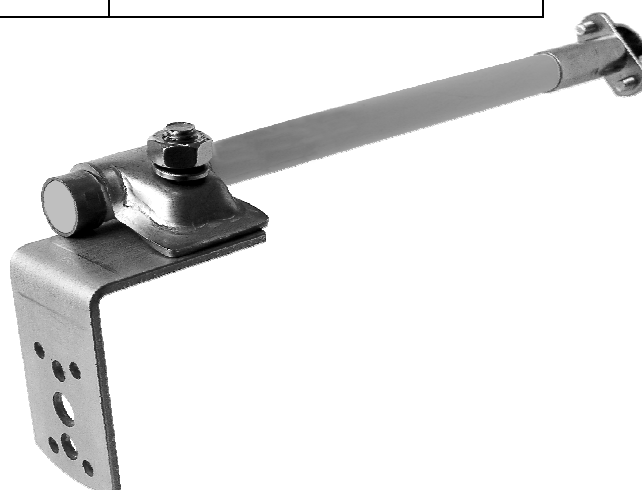

Description	RoHS2 (Guideline 2011/65/EU) and REACH (Regulation (EG) No.1907/2006): The substance-requirements and all other requirements of this regulations are observed by this product.
Mounting plate	Stainless steel 1-4301 30x3mm. 4 holes each 5,1mm, 1 hole 6,5mm. 1 holes 8,5mm and 1 hole each 11,0mm
Material of the insulator	GRP-rod 16mm Ø made of pultruded polyester, grey (RAL 7000)
Material of the sleeves	Stainless steel 1-4301 1mm.
Holder	Stainless steel-holder made of VA 1-4301. For conductor 16mm Ø, with two cylinder head screws DIN84M6x16A2
Bolting (all stainless steel)	1 x DIN603M10X35; 1 x DIN934M10; 1 x Spring washer 10mm