

Specification	Insulating spacer 25mm Ø, 500mm long, for 16mm conductor with an aluminium anchor plate 130x30mm. With a nylon-conductor holder. Weight: 355g Standard ref.: DIN EN 62561-4
Article No.	65 20 00



Customs tariff No.: 85389099

Useful information regarding construction units with GRP-components:

Tests made by the company BASF have shown that construction units made of GRP – in contrast to thermoplastic compounds – are hardly impacted by UV-A respectively UV-B rays concerning their mechanical properties (no embrittlement respectively cracks).

Depending on the resin base as well as the type and quantity of the radiation a yellowing in the course of time is possible, which however has no influence on the quality of the material.

GRP is exceptionally weather-resistant. On average a removal of material due to weather of only 0,05 mm within ten years can be assumed.

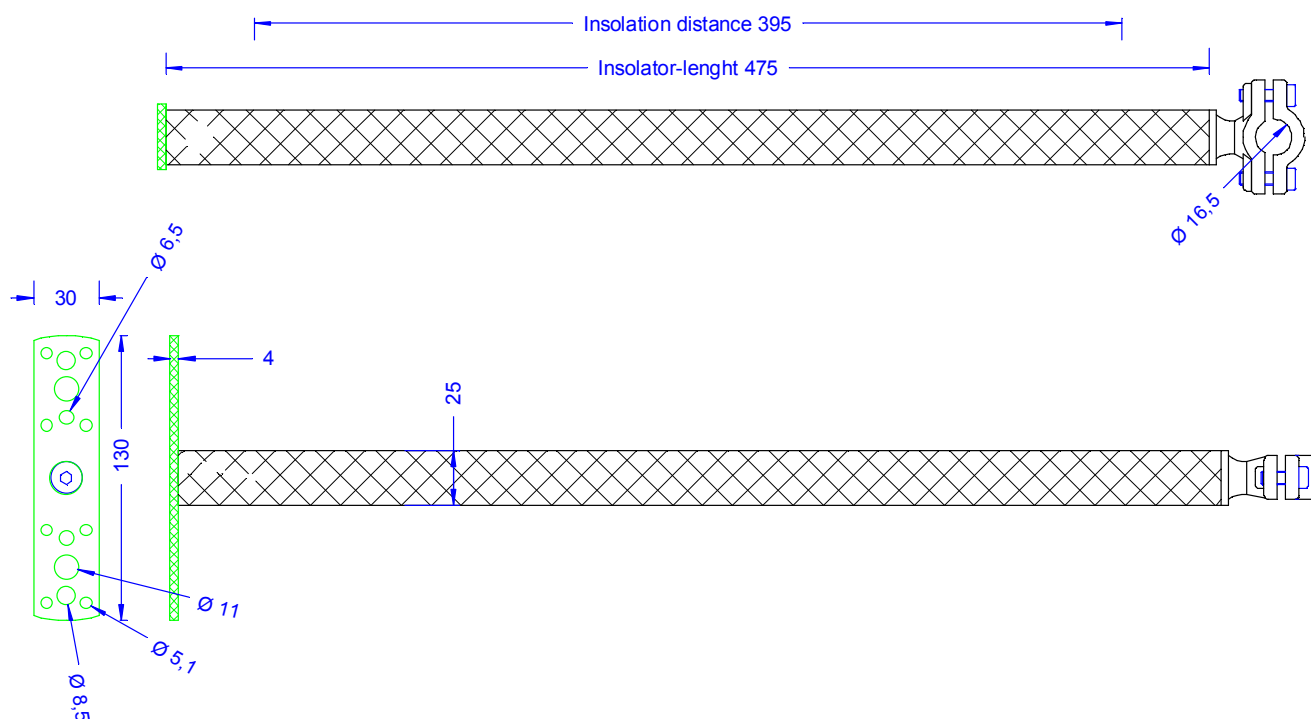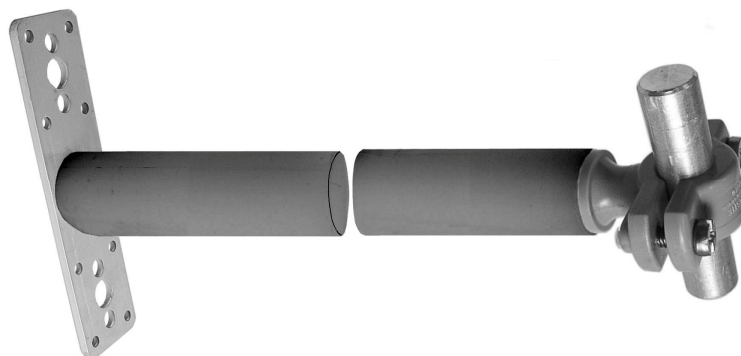

Description	RoHS2 (Guideline 2011/65/EU) and REACH (Regulation (EG) No.1907/2006): The substance-requirements and all other requirements of this regulations are observed by this product.
Mounting plate	Aluminium. With following holes on each side: 4x5, 1 + 2x6,5 + 2x8,5 + 1x11mm.
Material of the insulator	Polyamide bar, glas fiber reinforced. 25mm Ø. UV-stabilized, halogen free. Grey.
Holder	Nylon-holder (grey) for 16mm Ø conductor out of UV-stabilized polyamide. Halogen free.
Bolting (all in stainless steel)	2 x DIN84M6x14, 1 x SEKO6x40. 1 x DIN933M8x25