

Specification	Insulating spacer 16mm 1000mm long with stainless steel pipe clamp for 1 1/2 - 2 inch. With holder for 6-11mm conductor. Weight: 922g Standard ref.: : DIN EN 62561-4
Article No.	69 17 08



Customs tariff No.: 85389099

Useful information regarding construction units with GRP-components:


Tests made by the company BASF have shown that construction units made of GRP – in contrast to thermoplastic compounds – are hardly impacted by UV-A respectively UV-B rays concerning their mechanical properties (no embrittlement respectively cracks).

Depending on the resin base as well as the type and quantity of the radiation a yellowing in the course of time is possible, which however has no influence on the quality of the material.

GRP is exceptionally weather-resistant. On average a removal of material due to weather of only 0,05 mm within ten years can be assumed.

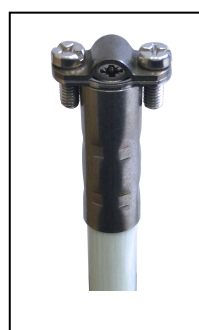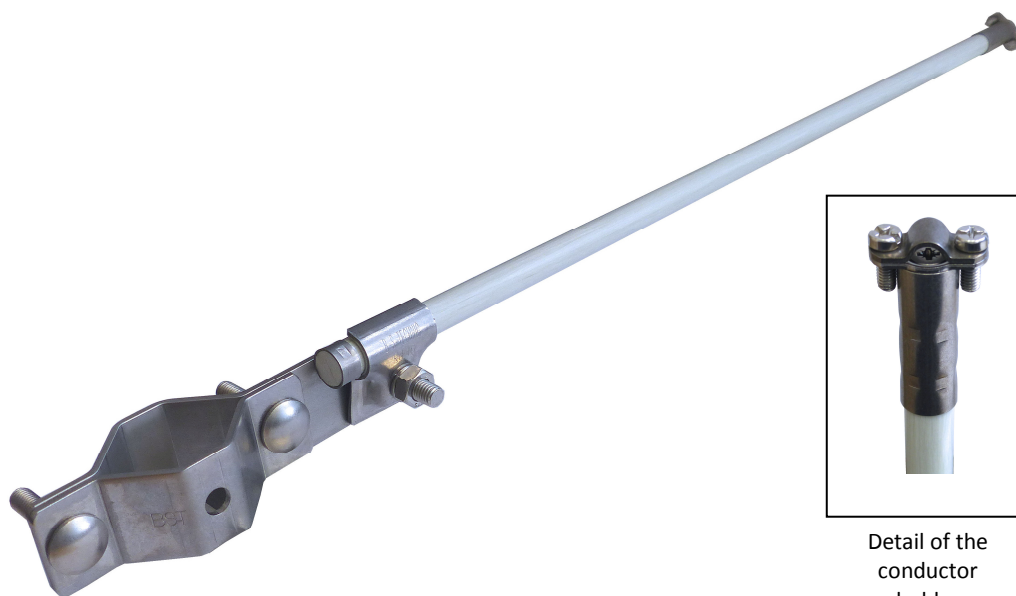

Detail of the
conductor
holder

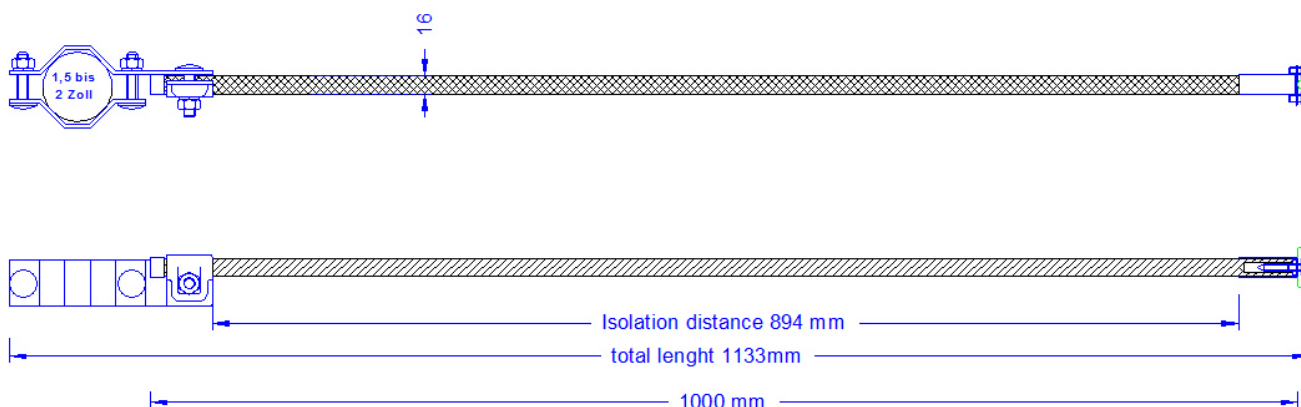

Description	RoHS2 (Guideline 2011/65/EU) and REACH (Regulation (EG) No.1907/2006): The substance-requirements and all other requirements of this regulations are observed by this product.
Pipe clamp	For Pipe 1 1/2 - 2 inch out of stainless steel
Material of the insulator	GPR-rod 16mm Ø made of polyester, grey (RAL 7000)
Material of the sleeves	Stainless steel 1-4301.
Holder	Stainless steel holder (1-4301). For 6-11mm Ø conductor, with two cylinder head screws
Bolting	All screw connections are out of stainless steel.
Fixingclamp of the insulator	Stainless steel clamp for 16mm Ø