

<b>Specification</b>	Insulating spacer 16mm 1000mm long without foot part, with holder for 16mm conductor. Weight: 440g Standard ref.: DIN EN 62561-4
<b>Article No.</b>	<b>69 01 03</b>



Customs tariff No.: 85389099

**Useful information regarding construction units with GRP-components:**

Tests made by the company BASF have shown that construction units made of GRP – in contrast to thermoplastic compounds – are hardly impacted by UV-A respectively UV-B rays concerning their mechanical properties (no embrittlement respectively cracks).

Depending on the resin base as well as the type and quantity of the radiation a yellowing in the course of time is possible, which however has no influence on the quality of the material.

GRP is exceptionally weather-resistant. On average a removal of material due to weather of only 0,05 mm within ten years can be assumed.

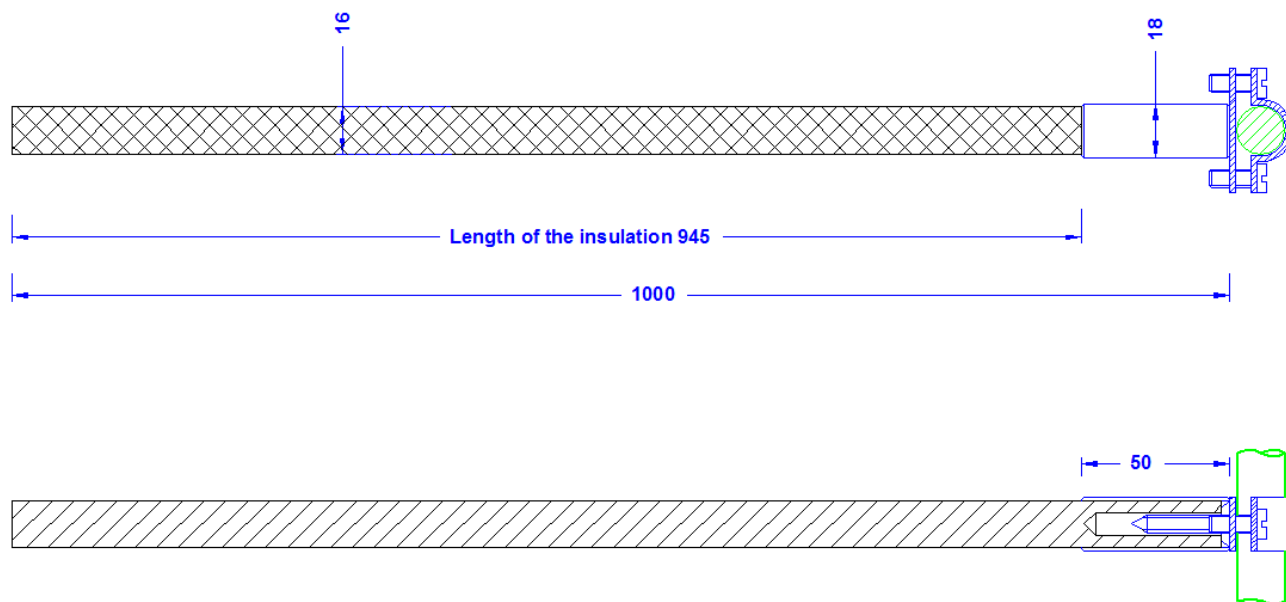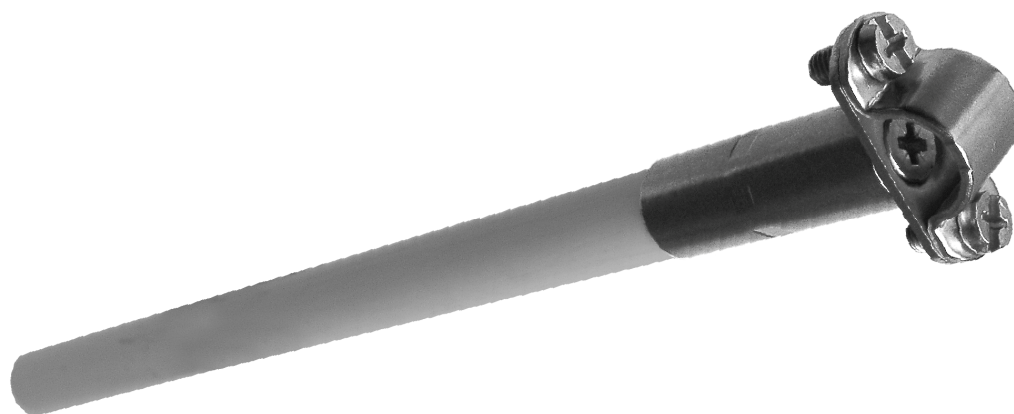

<b>Description</b>	RoHS2 (Guideline 2011/65/EU) and REACH (Regulation (EG) No.1907/2006): The substance-requirements and all other requirements of this regulations are observed by this product.
<b>Material of the insulator</b>	GPR-rod 16mm Ø made of polyester, grey
<b>Material of the sleeve</b>	Stainless steel 1-4301.
<b>Holder</b>	Stainless steel holder ( 1-4301). For 16mm Ø conductor, with two cylinder head screws
<b>Bolting</b>	All screw connections are out of stainless steel.