
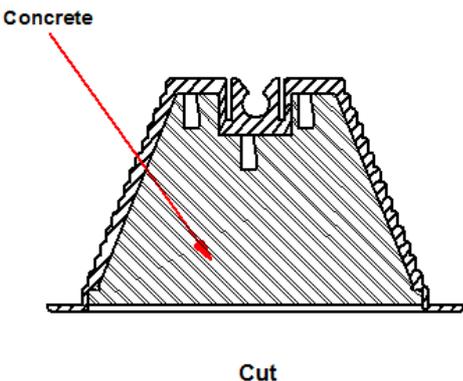
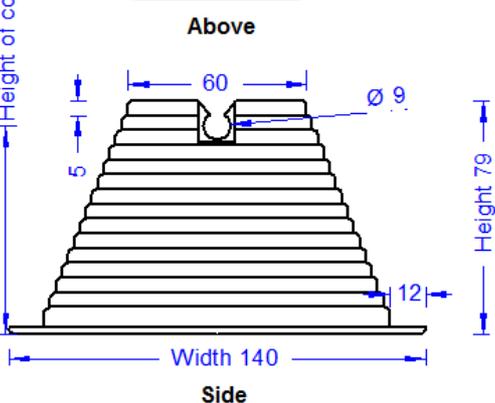


Specification	Pyramid holdfast without bottom for flat roofs, filled with concrete, to suit 8mm conductor. Made of polyethylene. Black. Weight: 1 kg
Article No.	45 01 16

Customs tariff No.: 85389099

DIN EN 62561-4:
„The fastening of holders to structures covered with tar paper, membrane and gravel roofs is not treated in the present standard due to the multitude of types which are used on modern constructions.“

For laying lightning protection wires on flat roofs. The holdfast is just placed on the flat roof and holds by its weight.

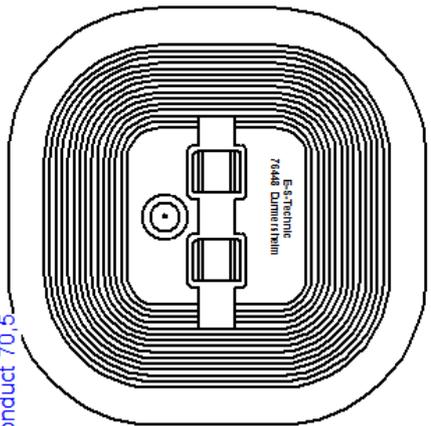

Description	RoHS2 (Guideline 2011/65/EU) and REACH (Regulation (EG) No.1907/2006): The substance-requirements and all other requirements of this regulations are observed by this product.
Weight	1 kg
Input	8 mm conductor
Material of the holdfast	LD-PE, black. No halogens, UV-stabilized and cold impact resistant.
Concrete	1 kg frost-resistant concrete.