
Technical Datasheet

Specification	Empty Pyramide holdfast, for 8mm conductor, with mounted plastic bottom 140 x 140mm, to be bonded on flat roofs, height 70mm. Black. Weight: 132g
Article No.	45 08 16

DIN EN 62561-4:

"The fastening of holders to structures covered with tar paper, membrane and gravel roofs is not treated in the present standard due to the multitude of types which are used on modern constructions."

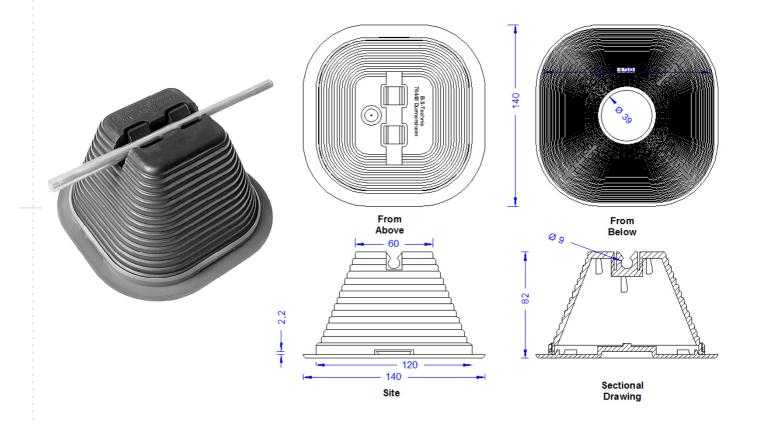

Customs tariff No.: 85389099	For glueing into hot- or cold bitumen
Description	RoHS2 (Guideline 2011/65/EU) and REACH (Regulation (EG) No.1907/2006): The substance-requirements and all other requirements of this regulations are observed by this product.
Weight	132 g
Input	1 x conductor 8mm
Material of the holdfast	LDPE-Regranulate black, halogen free.
Material of the bottom	Polypropylen, black. Halogen free.