
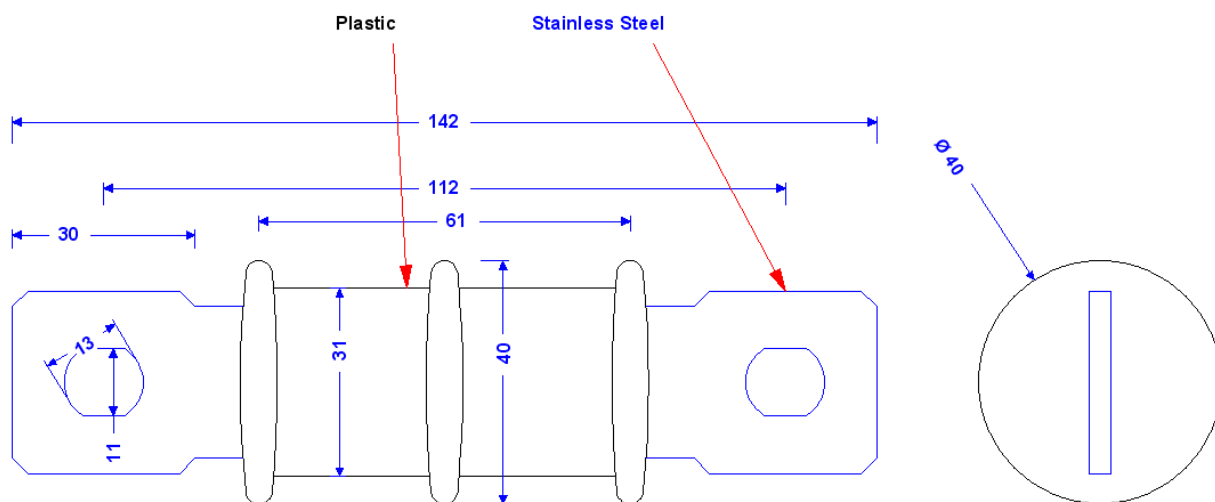


Specification	Spark gap for roof supports, protection class IP54 with stainless steel connection lug. Weight: 120g Reference Standard: DIN EN 62305 + DIN VDE 0211
Article No.	56 03 10

Customs tariff No.: 85389099

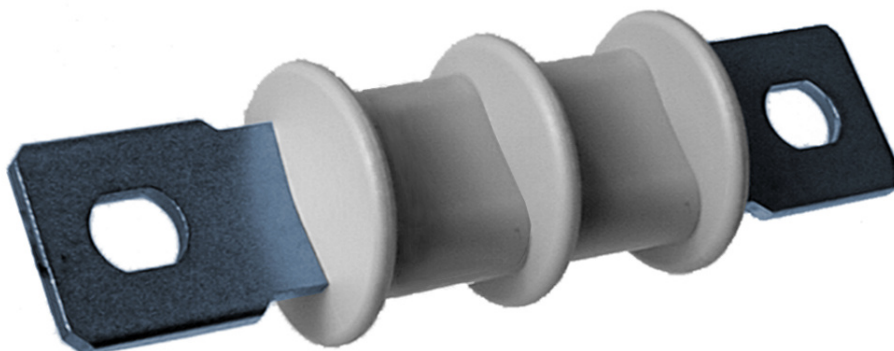

Description	RoHS2 (Guideline 2011/65/EU) and REACH (Regulation (EG) No.1907/2006): The substance-requirements and all other requirements of this regulations are observed by this product.
Material of the lugs	Stainless steel V2A
Material of the coat	Plastic
100% - Response-lightning current voltage (1,2/50) U_{as100} kV	~25
Nominal discharge surge current (8/20) I_n kA	25
Protection class	IP54
Response alternating voltage (50Hz) U_{aw} kV	~10