

<b>Specification</b>	Insulating air termination mast 50mm Ø 10m height, with 2,0m GRP-tube, 6,0m aluminum tube without cable outlet and with 2m 16mm to 10mm Ø aluminum-tip. <b>Systemweight: 15,4 kg</b>
<b>Article No.</b>	<b>68 04 79</b>

Customs tariff No.:  
85389099


Transport length: 6,0m

For the Inner- or outer  
laying of the OBO-IsCon-  
cable.

(See separate manual)



Optional  
Internal  
equipotential  
bonding  
ArtNo.68 05 76  
(not included)  
when the OBO  
IsCon cable is  
laid inside the  
mast

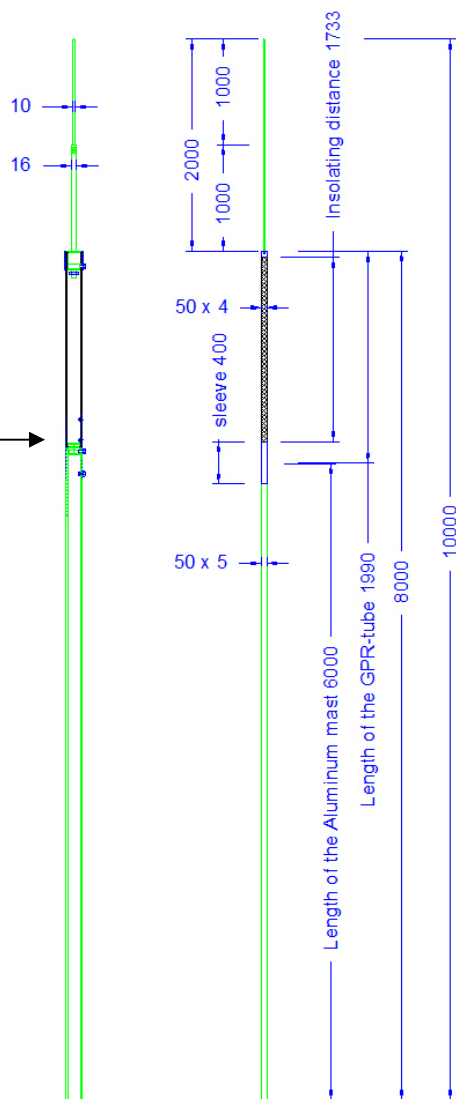

Description	
<b>Mast tip</b>	Interception rod 16mm to 10mm Ø rejuvenated. 2m long, out of aluminum. Pluggable and fixed with a screw.
<b>Sleeve for the intake of the tip</b>	Stainless steel tube 1-4301 with 54,0mm Ø and 60mm length. Bolted.
<b>Upper part of the mast</b>	2,0m GRP-tube 50mm Ø, light grey, UV-stable.
<b>Connecting sleeve</b>	Stainless steel tube 1-4301 with 54mm Ø and 400mm length.
<b>Lower part of the mast</b>	Aluminum tube 50mm Ø, 6000 mm length. Pluggable and fixed with screws.
<b>Screws/Nuts/Rivets/Spring washer (All out of stainless steel)</b>	2 x DIN933M8X16; 1 x DIN933M8X10/ 1 x DIN936M10FLACH / 2 x pop rivet 4x6; 2 x pop rivet 6x12/ 3 x spring washer 8