


|                      |   |
|----------------------|---|
| <b>Specification</b> | Spacer bar with 1/4 inch clamp. 1m long.<br>Made of GRP-tube 31mm Ø, with mini-multi-purpose clamp for 8mm cond. or rope till 9mm.<br>Insulating distance 880mm.<br>System weight: 1,1 kg |
| <b>Article No.</b>   | <b>68 02 02</b>   |

Customs tariff No.:  
85389099

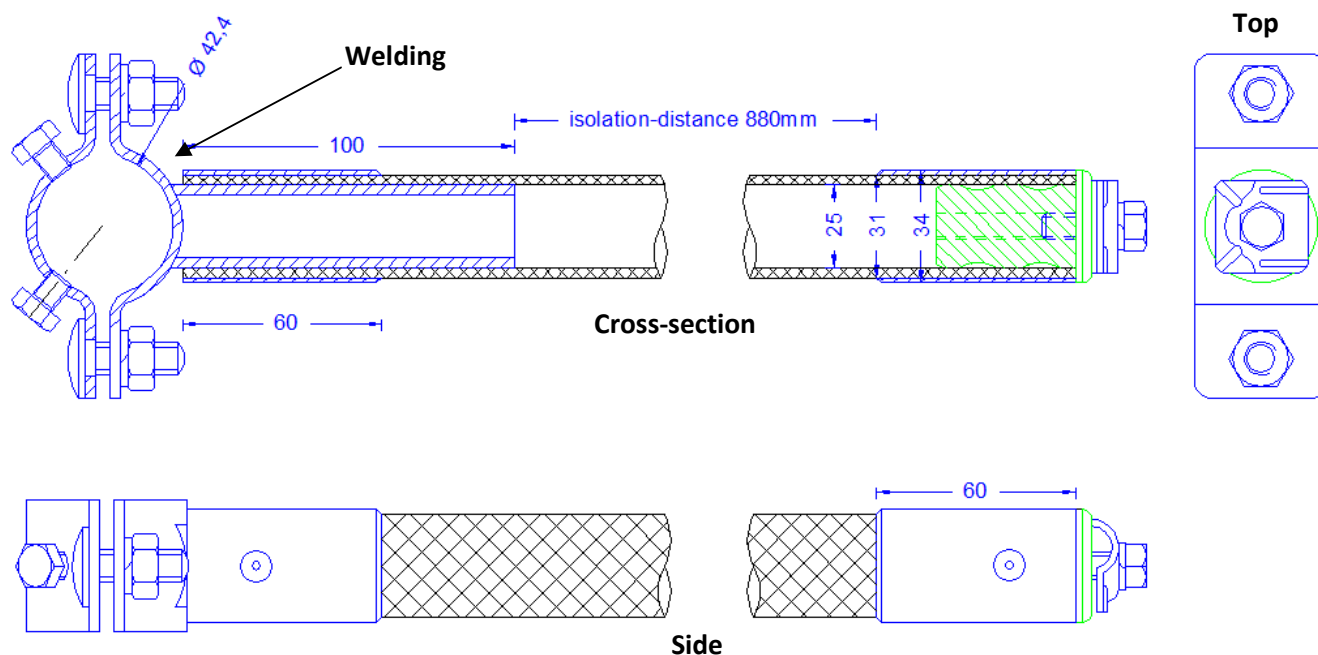

| <b>Description</b>   |  |
|--|--|
| <b>Spacer bar – mast connecting piece</b>                            | 1 1/4 inch clamp welded and riveted.   |
| <b>Sleeves for take-up of the upper/lower part of the spacer bar</b> | Stainless steel tube 1-4301 with 31,0mm Ø and 60mm length. Riveted.  |
| <b>Spacer bar - tube</b>   | GRP-tube 31 x 25 mm. Colour: Grey (RAL 7000). 1m long.   |
| <b>Spacer bar – conductor-connecting piece</b>                       | Mini-multi-purpose clamp made of stainless steel 1-4301 for cond, till 8mm or rope till 9mm. Fixed with hexagon head screw M8. |
| <b>Screws/nuts/rivets/spring washers (all stainless steel)</b>       | 1 x DIN933M8X25; 2 x DIN603M10X30 / 2 x DIN934M10 / 4 x blind rivet 5 x 8mm/ 1 x spring washer 8mm; 2 x spring washer 10mm.    |