
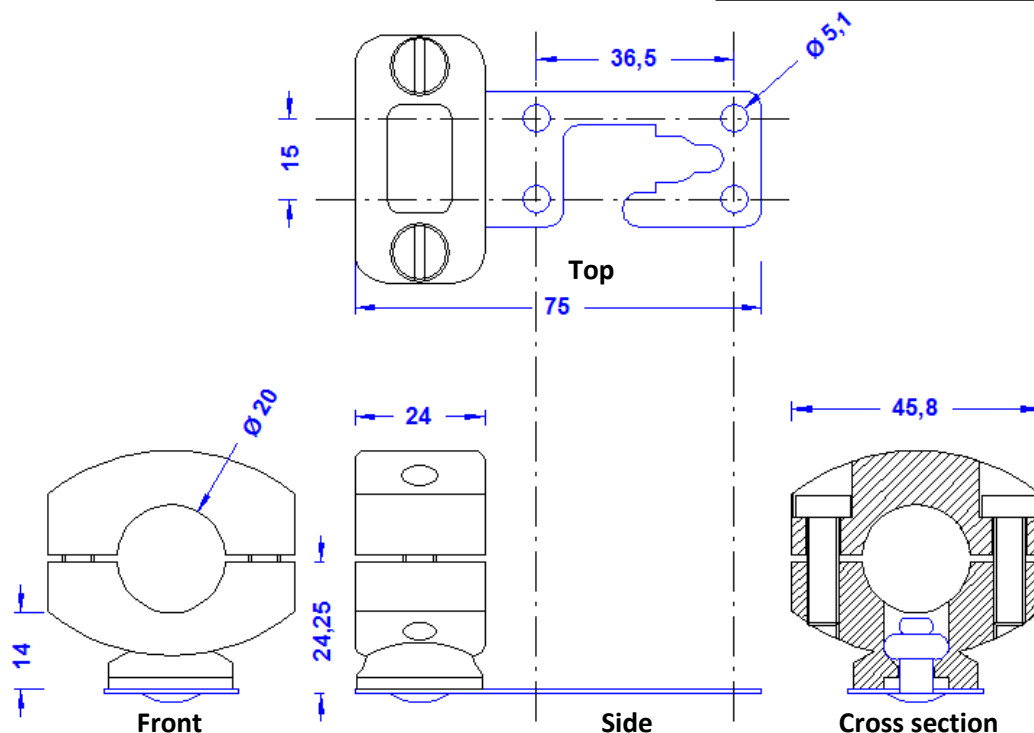
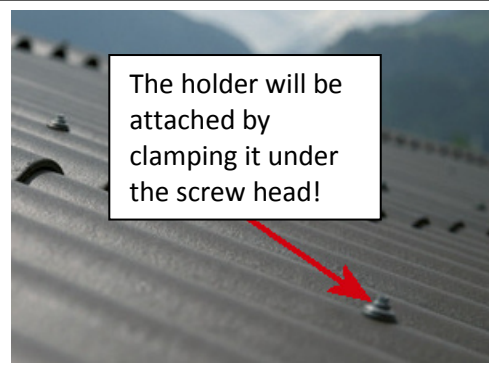


Specification	Corrugated Eternit support for ISO-conductor 20mm, 75mm long with nylon-holder, with a Strukta hook and 4 rivet holes . Bottom part out of stainless steel. Weight: 45g Reference Standard: DIN EN 62561-4
Article No.	31 05 12

Customs tariff No.: 85389099

For roofing:

Corrugated roofs with Profile 5 or 8 (gap 177mm or 130mm).

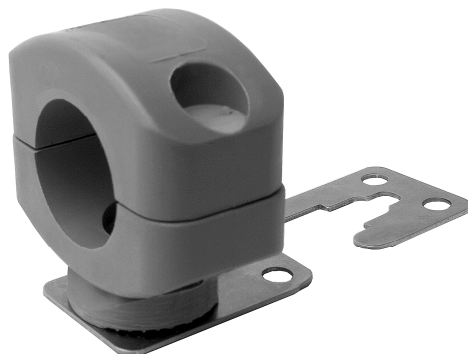

Description	RoHS2 (Guideline 2011/65/EU) and REACH (Regulation (EG) No.1907/2006): The substance-requirements and all other requirements of this regulations are observed by this product.
Material of the bottom part	Stainless steel 1-4301.
Material of the Holder	Polyamide grey (RAL7000), UV-stabilized and cold impact resistant. Without halogens.
Screws/Rivet	2 x DIN84M6X20 out of polyamide / rivet 6x12 stainless steel.
For conductor	20mm Ø
Conductor height	14mm