
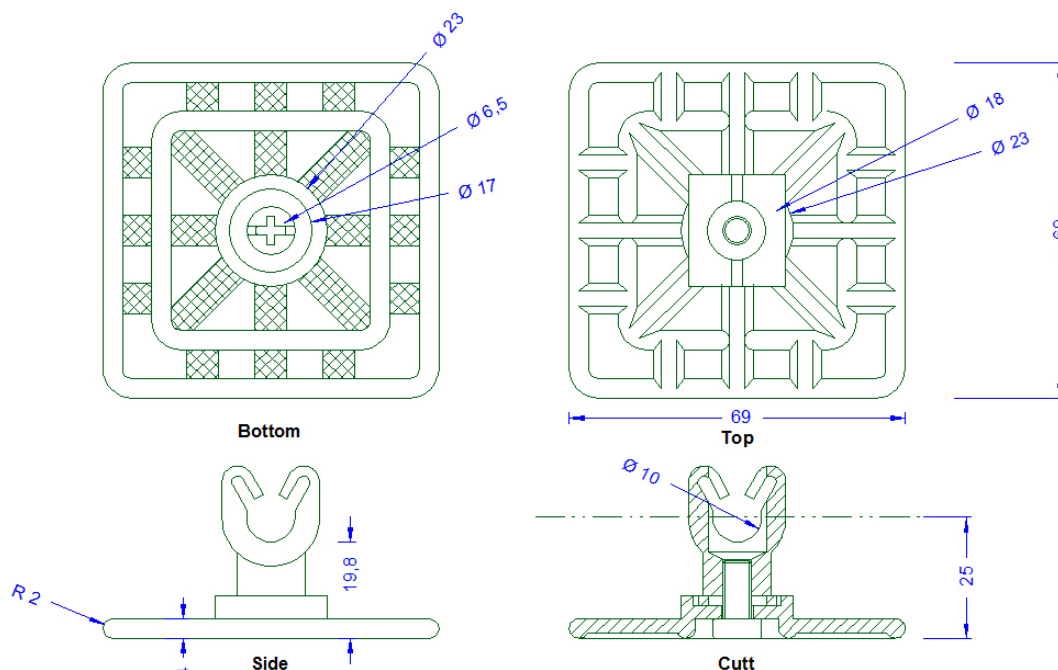


Specification	Adhesive rosette for conductor 8-10mm, with pivot able holder, height 25mm for flat roofs, out 25% bio-polyamide, base 70 x 70mm. Moosgreen (RAL6005). Weight: 20g
Article No.	46 47 15

Customs tariff No.: 85389099

DIN EN62561-4: „This standard *does not cover* the fixing of conductor fasteners to the fabric/membrane/ gravel roofing of structures due to the vast number and types used in modern day construction.“

Working temperature + 50°C bis -10°C

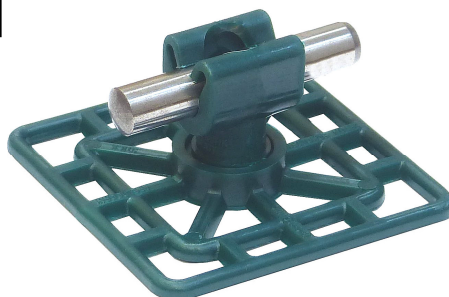

Description	RoHS2 (Guideline 2011/65/EU) and REACH (Regulation (EG) No.1907/2006): The substance-requirements and all other requirements of this regulations are observed by this product.
Holder	Duplo-Holder for 8-10mm conductor out of 25% bio-polyamide and 75% conventional polyamide. Colour RAL6005 (moos green). Cold impact resistant and UV-stabilized to the highest degree. Halogen-free.
Screws	1 x DIN84M6X12 stainless steel.
Bottom plate	Out of 25% bio-polyamide and 75% conventional polyamide. Colour RAL6005 (moos green). Cold impact resistant and UV-stabilized to the highest degree. Halogen-free.
Processing on the roof	To be glued on hot and cold bitumen.