


Specification	<p>Aluminum air termination mast two-part with 4-leg screw-fix stand made of stainless steel, with segments made of aluminium. With 4 threaded stainless steel rods. Height of the mast: 4,0m. Weight mast with stand: 6,1 kg System weight with concrete bases: 75 kg For wind speed zones I – II For ground category III- IV (max. gust speed 145 km/h)</p>
Article No.	48 39 36

Customs tariff No.: 85389099

The four concrete bases and the protective pads are **NOT** part of this product.

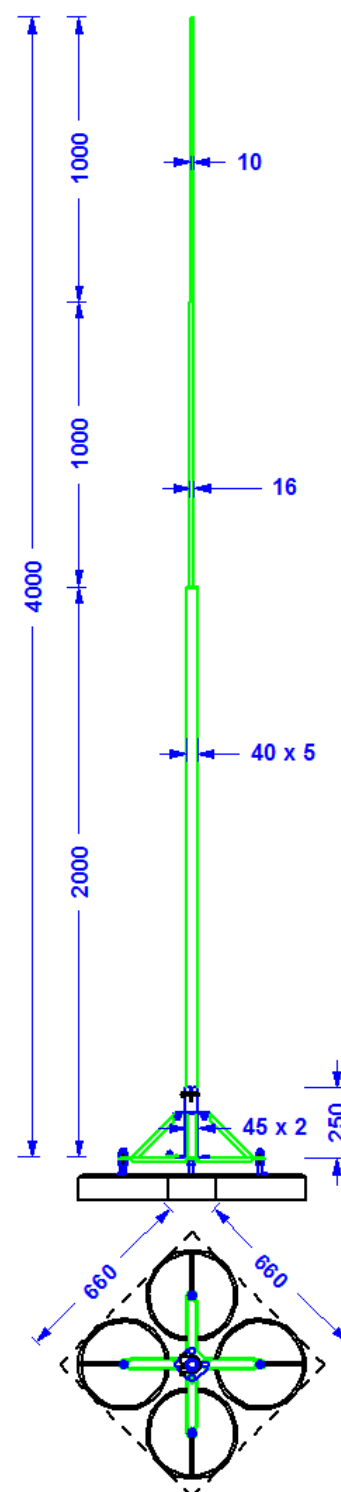

Description	Ø	Material	Length	Wind speed zone	Remarks
Mast main tube	40mm	Aluminium tube	2,0m	Wind speed zone I-II (accord. to Euro Code 1 as well as DIN EN 1991 and DIN EN 1993. At 1,5-fold safety). For ground category III - IV with max. gust speed 145 km/h. Applicable for building heights below 40m and area heights below 600m above NN. Higher buildings or areas as well as icing and self-oscillation are to be considered separately if necessary.	<ol style="list-style-type: none"> All screw connections are made of stainless steel. The concrete bases and the respective protective pads are not part of the product. System-weight including the concrete bases: 75 kg. Surface loading rate : 75 kg/m² Inclination adjustment till 5 degree is possible. Pack size: 2,0m long and 300mm Ø, weight: 6,0 kg. Weight of the mast 3,9 kg. Weight of the stand 2,2 kg.
Mast tip	1m 16mm, 1m 10mm	Aluminium-rods	2 x 1m		
Stand segments		Aluminium			
Stand central tube	45mm	Stainl. steel tube 1.4301	250mm		
Threaded rods for concrete bases	16mm	Stainl. steel 1.4301	200mm		