



Specification	Aluminum air termination rod with a 4-leg support made of stainless steel. With 4 threaded pieces made of stainless steel. Height of the air termination mast: 4,0m. Weight: 8,2 kg System weight with concrete sockets: 77 kg For wind speed zones I – II For ground category III- IV (max. gust speed 145 km/h)
Article No.	48 39 34

Customs tariff No.: 85389099

The concrete bases and the protective pads are not part of the product.

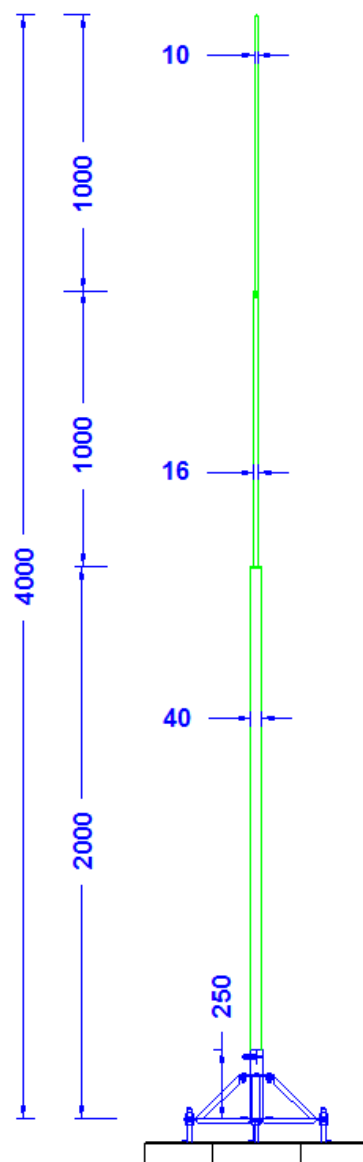

Description	Ø	Material	Lenght	Wind speed zone	Remarks
Mast main tube	40mm	Aluminum tube	2,0m	Wind speed zone I-II (accord. to Euro Code 1 as well as DIN EN 1991 and DIN EN 1993. At 1,5-fold safety). Max. gust speed 145 km/h. Applicable for building heights below 40m and area heights below 600m above NN. Higher buildings or areas as well as icing and self-oscillation are to be considered separately if necessary.	1. All connections are made of stainless steel.
Mast tip	1m 16mm, 1m 10mm	Aluminium rods	2 x 1m		2. The concrete bases and the respective protective pads are not part of the product .
Stand segments		Stainl. steel 1.4301			3. System-weight including the concrete bases: 77 kg.
Stand central tube	45mm	Stainl. steel tube 1.4301	250mm		4. Surface loading rate: 77 kg/m ²
Threaded rods for concrete bases	16mm	Stainl. steel 1.4301	200mm		5. Inclination adjustment till 5 degree is possible.
					6. Pack size: 2,0m long and 300mm Ø
					Weight: 8,2 kg.
					7. Weight of the mast: 3,9 kg. Weight of the stand: 3,0 kg.