


Specification	Aluminum air termination mast with 3- leg folding support made of stainl. steel and 3 threaded pieces made of stainl. steel to be fixed on concrete bases. Height of the air termination mast: : 4,5m. Weight(without concrete bases): 11,8 kg For wind speed zones I – II For ground category III- IV (max. gust speed 145 km/h)
Article No.	48 45 18

Customs tariff No.: 85389099

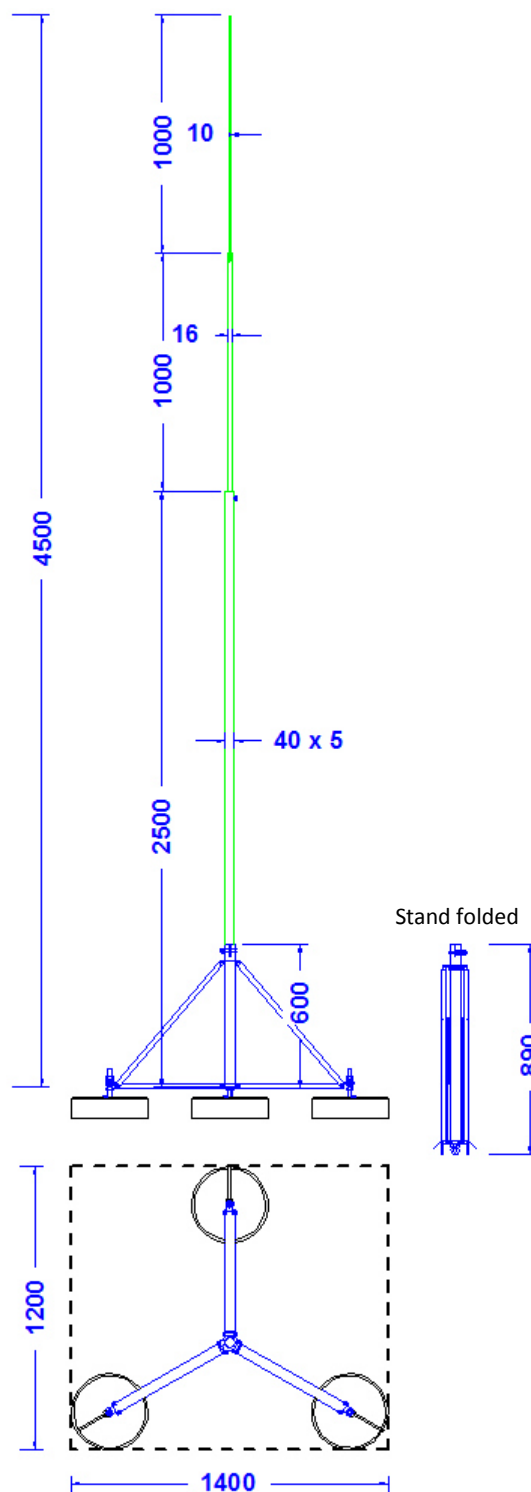

Description	Ø	Material	Length	Wind speed zone	Remarks
Mast main tube	40mm	Aluminium tube	2,5m	Wind speed zone I-II (accord. to Euro Code 1 as well as DIN EN 1991 and DIN EN 1993. At 1,5-fold safety). For ground category II - IV with max. gust speed 145 km/h. Applicable for building heights below 40m and area heights below 600m above NN. Higher buildings or areas as well as icing and self-oscillation are to be considered separately if necessary.	1. All connections are made of stainless steel. 2. The concrete bases and the respective protective pads are not part of the product. 3. System-weight including the concrete bases: 64 kg. 4. Surface loading rate: 38 kg/m² 5. Subject to technical modifications.
Mast tip	20mm + 12mm	Aluminium rods	1 x 2,0m 1 x 1,0m		
Stand segments		Stainl. steel 1.4301			
Stand central tube	45,0mm	Stainl. steel 1.4301	600 mm		
Threaded rods for concrete bases	16mm	Stainl. steel 1.4301	240 mm		