


Specification	Aluminum air termination rod with a 4-leg stainless steel support and 4 stainless steel threaded pieces as receptacles for concrete bases. Height of the air termination mast: 4,5m. Weight: 9,4 kg (without concrete bases) For wind speed zones III – VI (175 km/h) For ground category III- IV
Article No.	48 39 51

Customs tariff No.:
85389099

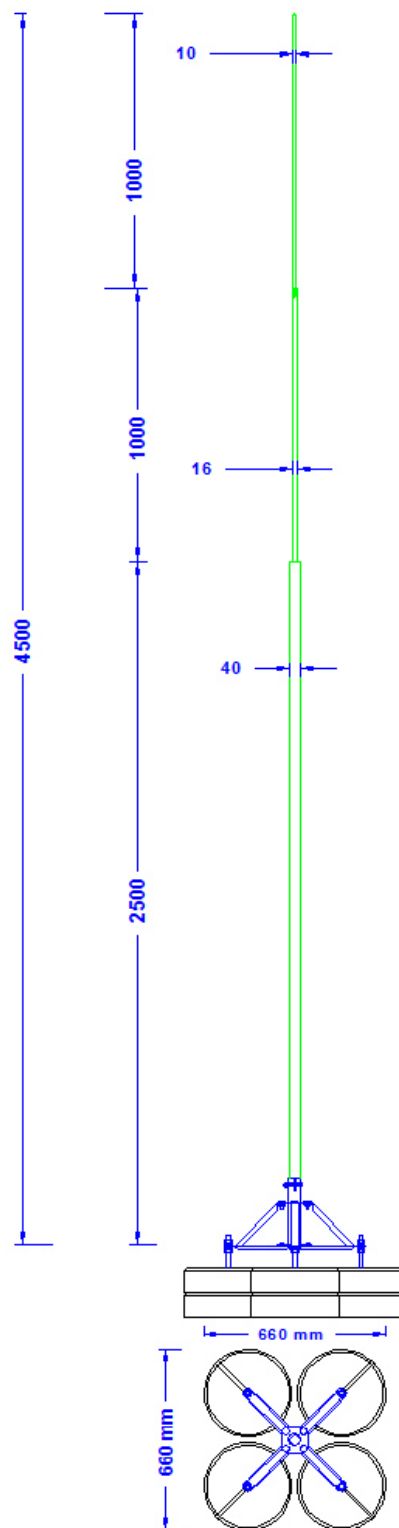

Description	Ø	Material	Length	Wind speed zone	Remarks
Mast main tube	40mm	Aluminum tube 40 x 5mm	2,5m	Wind speed zone III-VI (accord. to Euro Code 1 as well as DIN EN 1991 and DIN EN 1993. At 1,5-fold safety). Applicable for building heights below 40m and area heights below 600m above NN. Higher buildings or areas as well as icing and self-oscillation are to be considered separately if necessary.	<ol style="list-style-type: none"> All connections are made of stainless steel V2A. The concrete bases and the respective protective pads are not part of the product. System-weight including the concrete bases: 79 kg. Surface loading rate: 79 kg/m²
Mast tip	1m 16mm, 1m 10mm	Aluminium rods	2 x 1m		
Stand segments		Stainless steel 1.4301			
Stand central tube	45mm	Stainless steel tube 1.4301 45 x 2mm	250mm		
Threaded rods for concrete bases	16mm	Stainless steel 1.4301	300mm		