



<b>Specification</b>	Aluminium air termination mast two-part with 4-leg screw-fix stand made of stainless steel. With 4 threaded stainless steel rods. Height of the mast: 4,5m. Weight mast with stand: 9,0 kg System weight with concrete bases: 78 kg <b>For wind speed zones I – II</b> <b>For ground category III- IV</b> <b>(max. gust speed 145 km/h)</b>
<b>Article No.</b>	<b>48 39 31</b>

Customs tariff No.: 85389099

The four concrete bases  
and the protective pads are  
**NOT** part of this product.

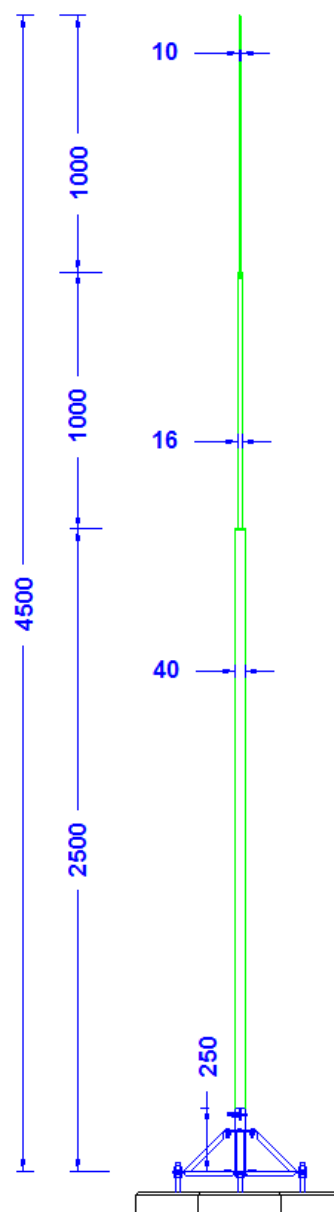

Description	Ø	Material	Length	Wind speed zone	Remarks
<b>Mast main tube</b>	40mm	Aluminium tube	2,5m	Wind speed zone I-II (accord. to Euro Code 1 as well as DIN EN 1991 and DIN EN 1993. At 1,5-fold safety). For ground category III - IV with max. gust speed 145 km/h. Applicable for building heights below 40m and area heights below 600m above NN. Higher buildings or areas as well as icing and self-oscillation are to be considered separately if necessary.	1. All screw connections are made of stainless steel. 2. System-weight including the concrete bases: 75 kg. 3. Surface loading rate: 78 kg/m² 4. Inclination adjustment till 5 degree is possible. 5. Pack size: 2,0m long and 300mm Ø Weight: 11,5 kg. 6. Weight of the mast 4,6 kg. Weight of the stand: 3,0 kg.
<b>Mast tip</b>	1m 16mm, 1m 10mm	Aluminium-rods	2 x 1m		
<b>Stand segments</b>		Stainless steel 1.4301			
<b>Stand central tube</b>	45mm	Stainless steel tube 1.4301	250mm		
<b>Threaded rods for concrete bases</b>	16mm	Stainless steel 1.4301	200mm		