


<b>Specification</b>	Aluminum air termination mast with 4-leg support out of stainless steel and 4 threaded pieces made of stainl. to be fixed on concrete bases. Height of the air termination mast: 5,5m. Weight: 12 kg; System weight: 148 kg <b>For wind speed zones I – II</b> <b>For ground category III- IV</b> <b>(max. gust speed 145 km/h)</b>
<b>Article No.</b>	<b>48 39 27</b>

Customs tariff No.: 85389099

The concrete bases and the protective pads are not part of the product.

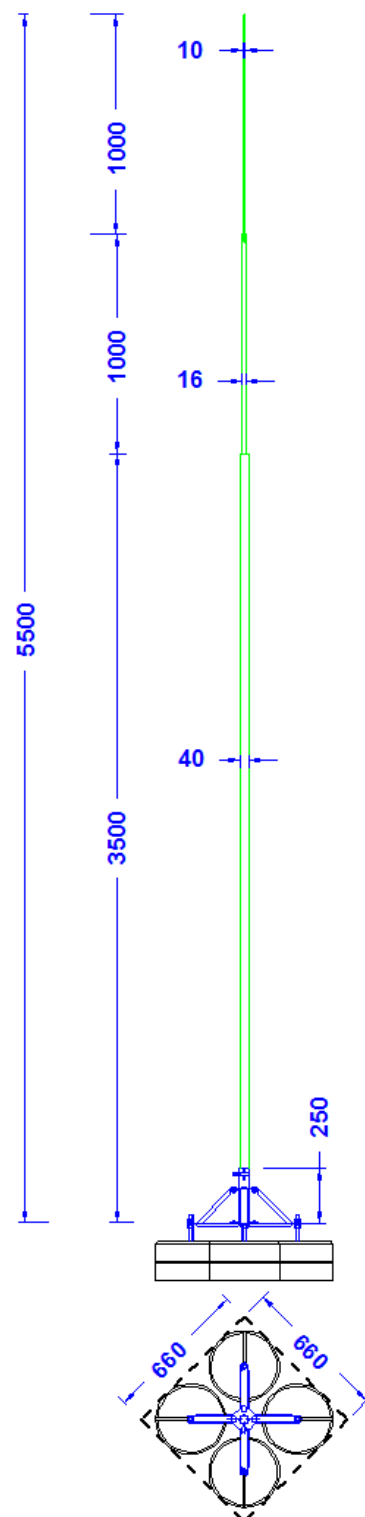

Description	Ø	Material	Lenght	Wind speed zone	Remarks
Mast main tube	40mm	Aluminum tube	3,5m	Wind speed zone I-II (accord. to Euro Code 1 as well as DIN EN 1991 and DIN EN 1993. At 1,5-fold safety). Max. gust speed 145 km/h. Applicable for building heights below 40m and area heights below 600m above NN. Higher buildings or areas as well as icing and self-oscillation are to be considered separately if necessary.	1. All connections are made of stainless steel 1.4301. 2. The concrete bases and the respective protective pads are not part of the product. 3. System-weight including the concrete bases: 148 kg. 4. Surface loading rate :148 kg/m². 5. Subject to technical modifications.
Mast tip	1m 16mm, 1m 10mm	Aluminum rods	2 x 1m		
Stand segments		Stainless steel 1.4301			
Stand central tube	45mm	Stainless steel tube 1.4301	250mm		
Threaded rods for concrete bases	16mm	Stainless steel 1.4301	300mm		