


Specification	Aluminum Air termination mast with 6-leg "Twister" stand out of aluminum, for six concrete bases 17 kg. Height of the mast: 5,5m. Weight: 11 kg; Systemweight: 114 kg Calculated for wind speed zones I – IV For ground category III - IV (max. gust speed 175 km/h)
Article No.	75 02 08

Customs tariff No.:
85389099

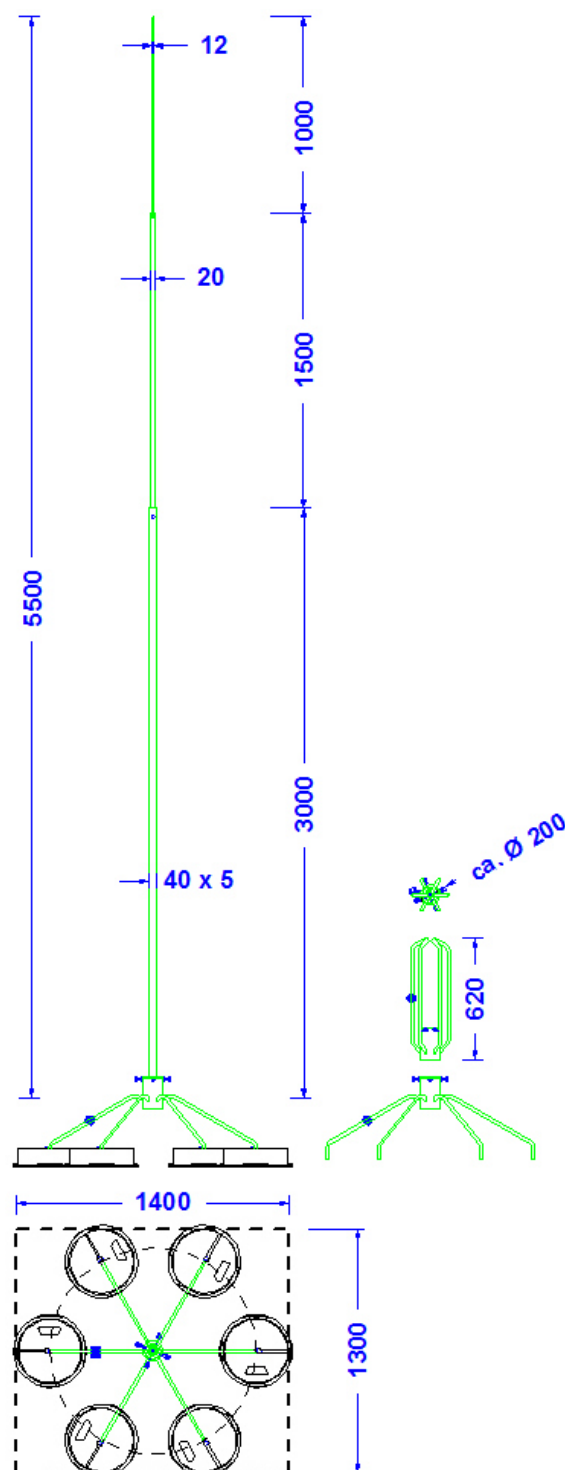

Description	Ø	Material	Length	Wind speed zone	Remarks
Mast main tube	40mm	Aluminium tube	3,0m	Wind speed zone I-IV for ground category III – IV ((accord. to Euro Code 1 as well as DIN EN 1991 and DIN EN 1993. At 1,5-fold safety) Applicable for building heights below 40m and area heights below 600m above NN. Higher buildings or areas as well as icing and self-oscillation are to be considered separately if necessary.	<ol style="list-style-type: none"> All connections are made of stainless steel 1.4301. The concrete bases and the respective protective pads are not part of the product. System-weight including the concrete bases: 114,0 kg. Surface loading rate: 63 kg/m² Terminal clamp 8-10mm made of stainl.steel, attached. Technical changes reserved.
Mast tip	1m 20mm, 1m 12mm	Aluminum rods	1 x 1,0m 1 x 1,5m		
Stand segments		Aluminum rods 16mm Ø			
Stand central tube	100 mm	Aluminium tube	163mm		