
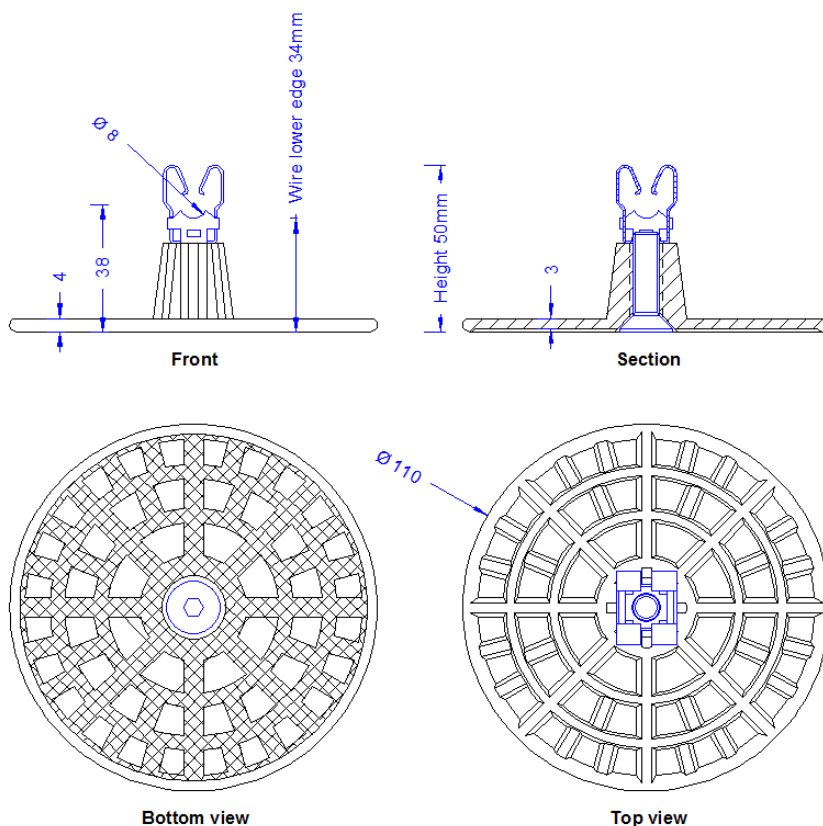


<b>Specification</b>	<b>Adhesive rosette for conductor 8mm, with pivotable stainless steel - holder. Nylon, grey. Weight: 40g</b>
<b>Article No.</b>	<b>46 01 50</b>

**DIN EN62561-4:** „This standard **does not cover** the fixing of conductor fasteners to the fabric/membrane/ gravel roofing of structures due to the vast number and types used in modern day construction.“

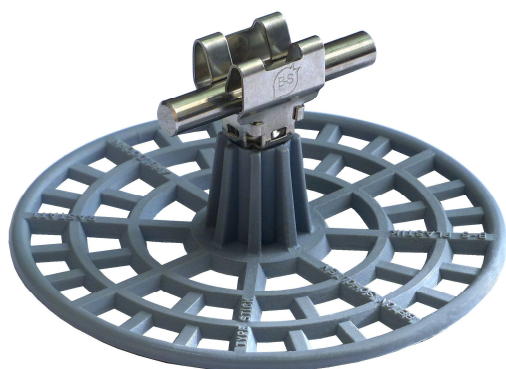

Customs tariff No.: 85389099

Application temperature + 50°C bis -10°C

<b>Description</b>	RoHS2 (Guideline 2011/65/EU) and REACH (Regulation (EG) No.1907/2006): The substance-requirements and all other requirements of this regulations are observed by this product.
<b>Holder</b>	<b>Stainless steel-holder for 8mm conductor made of spring steel strip.</b>
<b>Bottom plate</b>	<b>Made of polyamide. Colour grey. Cold impact resistant and UV-stabilized to the highest possible degree. Halogen-free.</b>
<b>Screw</b>	<b>DIN7991M8x30 in stainless steel</b>
<b>Processing on the roof</b>	<b>To be glued on hot or cold bitumen.</b>