


Specification	Adhesive rosette for strip till 30mm or round cond. 6-11mm with pivot able holder, made of Nylon. Grey. Weight: 46g
Article No.	46 12 15

DIN EN62561-4: „This standard **does not cover** the fixing of conductor fasteners to the fabric/membrane/ gravel roofing of structures due to the vast number and types used in modern day construction.“

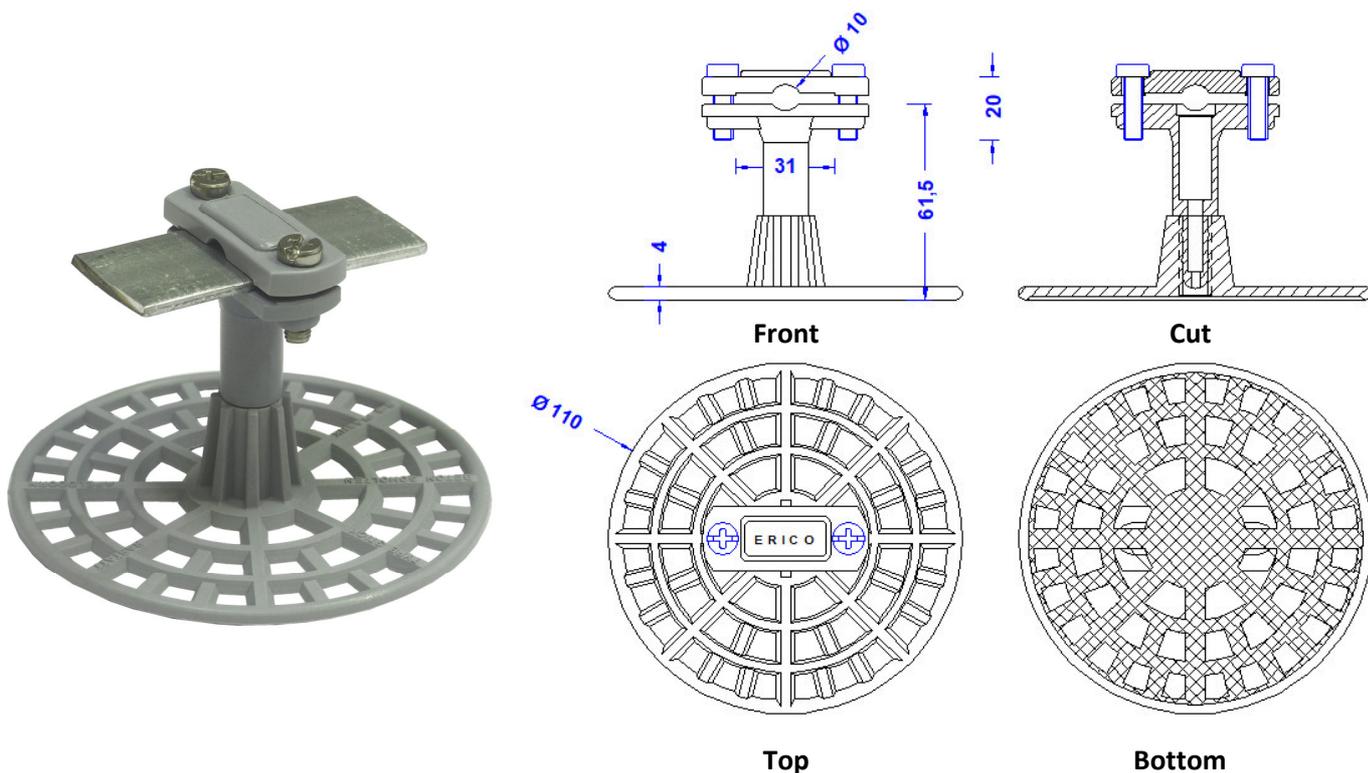

Customs tariff No.: 85389099

Application temperature + 50°C bis -10°C

Description	RoHS2 (Guideline 2011/65/EU) and REACH (Regulation (EG) No.1907/2006): The substance-requirements and all other requirements of this regulations are observed by this product.
Holder	Nylon-strip holder for flat cond. till 30mm or round cond. till 11mm, made of polyamide. Colour RAL7000 (grey). Cold impact resistant and UV-stabilized to the highest degree. Halogen-free.
Bottom plate	Made of polyamide. Colour grey. Cold impact resistant and UV-stabilized to the highest degree. Halogen-free.
Screws	2 x DIN84M6X20, stainless steel.
Processing on the roof	To be glued on hot and cold bitumen.