

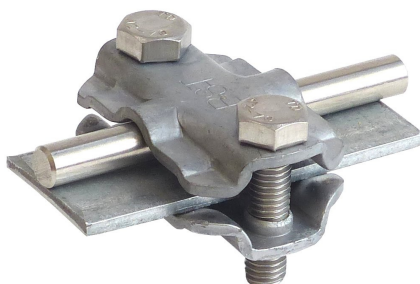



Specification	<p>Connecting-disconnecting clamp, for connection of round cond. 2 x \varnothing 8-10mm or 2x flat cond. till 30mm or 1 x flat cond. 30mm and 1 x round cond. \varnothing 8-10mm. Hot galvanized steel.</p> <p>Weight: 125g</p> <p>Reference Standard DIN EN 62561-1</p>
Article No.	49 60 17

Customs tariff No.: 85389099

Configuration options:

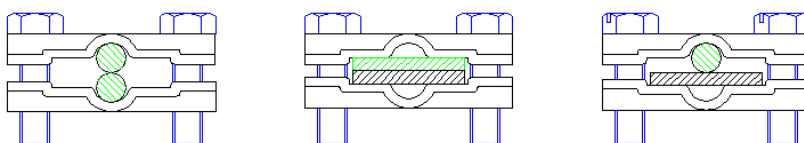


Bottom

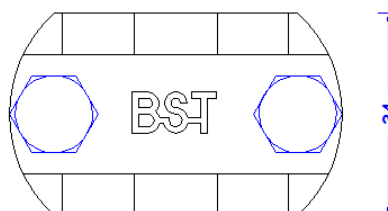


Above

34



Side

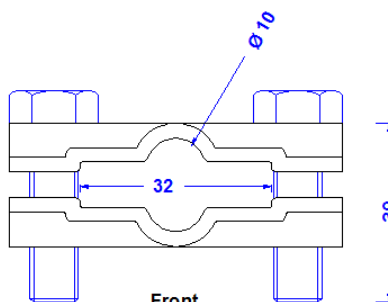

Front

41
56

Description	RoHS2 (Guideline 2011/65/EU) and REACH (Regulation (EG) No.1907/2006): The substance-requirements and all other requirements of these regulations are observed by this product.
Material of the clamp	Hot galvanized steel.
Screws	2 x DIN933M8X30 stainless steel
Take-up round/flat	\varnothing 8-10mm / up to 30mm