

|                      |   |
|----------------------|---|
| <b>Specification</b> | Stainless steel-air termination mast 11,0m height, 4-part. With 2,5m aluminum-tip.<br><b>System weight: 28 kg</b> |
| <b>Article No.</b>   | <b>48 32 41</b>   |


**Calculation basis:**

Accord. to DIN 1005, 4131, 18800.  
With 1,5-fold safety.  
Wind speed zone II  
Building height <= 40m  
Area height <= 600m NN

**RoHS2 (Guideline 2011/65/EU) and REACH (Regulation (EG) No.1907/2006):**

The substance-requirements and all other requirements of this regulations are observed by this product.

**Transport length: 3,5m**

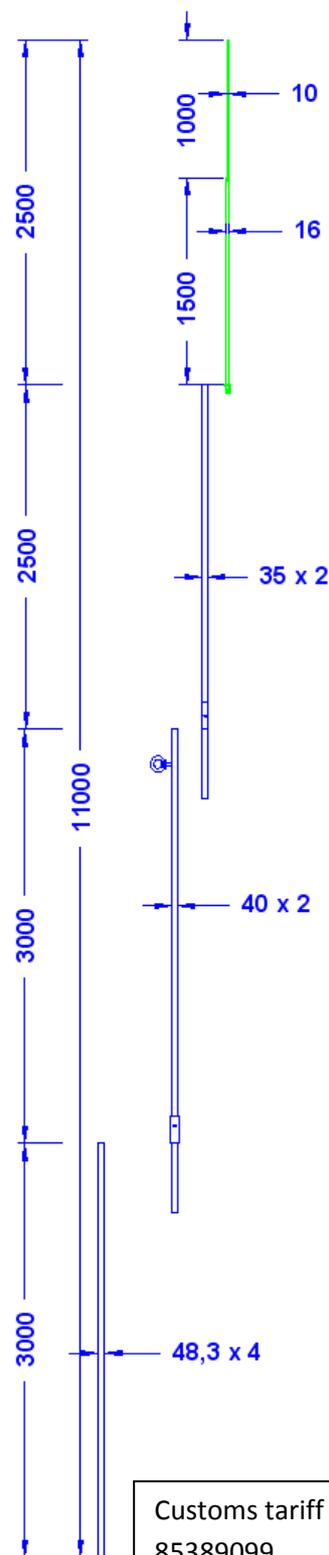

**Customs tariff No.:**  
85389099

|  |   |
|--|---|
| <b>Description</b>                                 | <b>RoHS2 (Guideline 2011/65/EU) and REACH (Regulation (EG) No.1907/2006):</b> The substance-requirements and all other requirements of this regulations are observed by this product. |
| <b>Mast tip</b>                                    | 1,5m ALU-rod 16mm Ø; 1m ALU-rod 10mm Ø, press-fitted.<br>All parts made of aluminum ALMGSI0,5.  |
| <b>Mast upper part</b>                             | 2,5m stainless-steel-tube (made of 1.4301) 35 x 2mm Ø,<br>3,0m stainless-steel-tube (made of 1.4301) 40 x 2mm Ø.  |
| <b>Mast lower part</b>                             | 3,0m stainless-steel-tube (made of 1.4301) 48,3 x 4mm Ø   |
| <b>Screws/spring washers (all stainless steel)</b> | 5 x hexagon head screw DIN933M8X10; 1 x ring screw M10<br>DIN580M10 / 5 x spring washer 8mm accord. to DIN127B8   |