
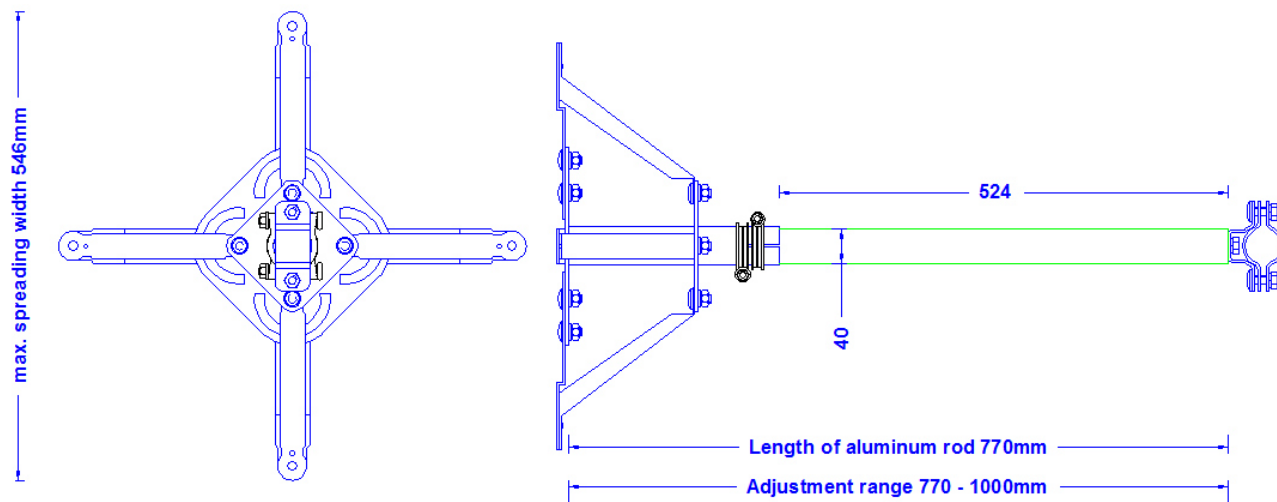
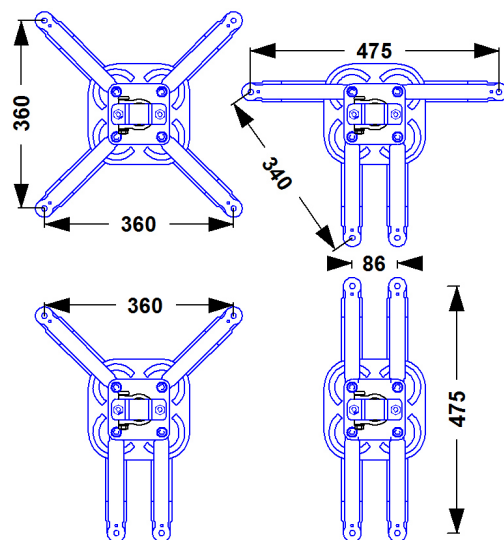


<b>Specification</b>	4-arm wall holder for air termination masts 40mm Ø, with a wall distance of max. 1000mm. Screw spacing of the wall bracket can be varied from 200 - 500mm. System weight: 5,3 kg
<b>Article No.</b>	<b>68 04 25</b>

Customs tariff No.: 85389099

Suited for an air termination mast up to a total height of 10m with a maximum distance to the wall of 1,0m and the use of two wall holders.

**Possibilities in configuration:**

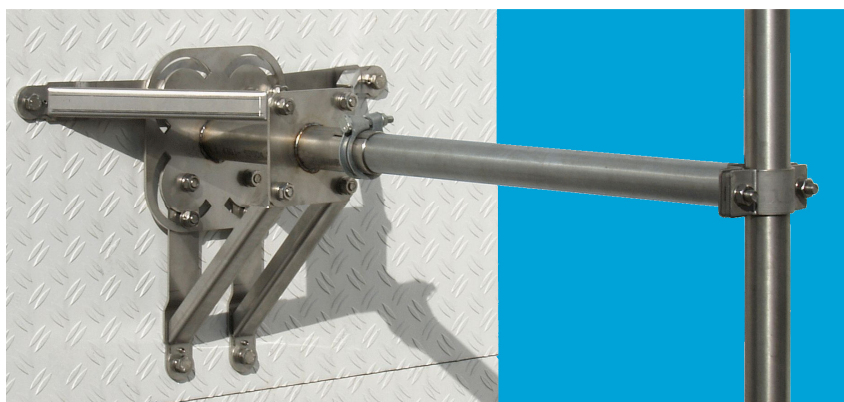

<b>Description</b>	
<b>Spacer mast connecting piece</b>	1 ¼ inch clamp for 40 - 50mm Ø made of stainless steel 1.4301.
<b>Spacer rod</b>	Aluminum rod 40 mm Ø , 770mm long.
<b>Fixing of the spacer tube</b>	2 x pipe clamp 45mm Ø made of steel, hot dip galvanized.
<b>Spacer bracket</b>	Telescopic-spacer clamp for 40mm Ø with 4 screw points 11mm Ø. The beams are freely rotatable around the central tube. Completely made of stainless steel 1.4301.
<b>Screwing (all made of stainless steel)</b>	<b>Inside the clamp:</b> 2 x round head screw M10 x50; 2 x nut M10; 2 x spring washer 10mm. <b>Fixing of the clamp:</b> Hexagon screw M10 x 30mm, spring washer 10mm <b>Spacer clamp:</b> 4 x blind rivet 5 x 8mm; 12 x round head screw M10 x 20mm; 13 x nut M10; 13 x spring washer 10mm.