
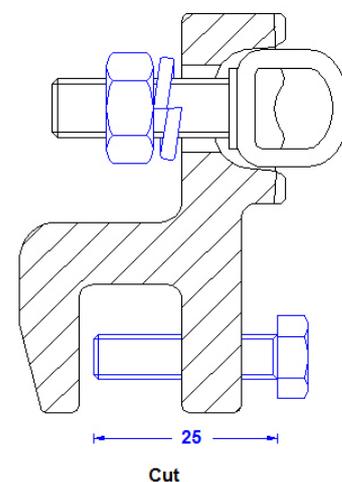
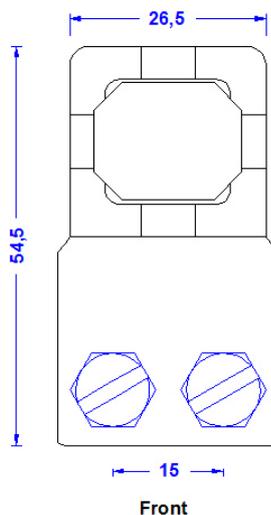
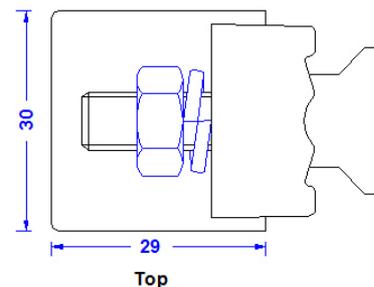


<b>Specification</b>	<p>Connection clamp for steel constructions and steel sheets, for conductor 7-10mm, clamping range 1-12mm. Connection lengthwise and crosswise.  <b>Weight: 188g</b>  <b>Reference Standard: DIN EN 62561-1.</b></p>
<b>Article No.</b>	<b>51 12 40</b>

Customs tariff No.: 85389099

Tested for 50 kA (10/350µs)

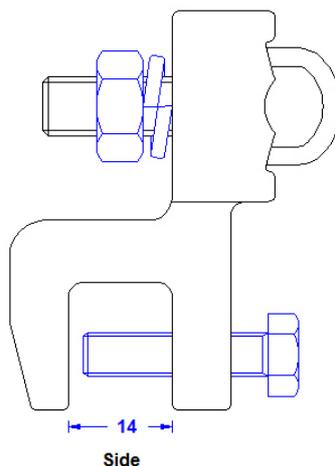

<b>Description</b>	RoHS2 (Guideline 2011/65/EU) and REACH (Regulation (EG) No.1907/2006): The substance-requirements and all other requirements of this regulations are observed by this product.
<b>Material of the clamp</b>	<b>Malleable iron hot dip galvanized</b>
<b>Eye screw</b>	<b>M10, steel hot dip galvanized</b>
<b>Bolting</b>	<b>Screws: 2xDIN933M6X25 stainless steel; nut/spring washer: DIN934M10 stainless steel/spring washer 10mm stainless steel</b>
<b>Clamping range (seam)</b>	<b>till 1,0-12,0mm</b>
<b>Conductor leading</b>	<b>7-10mm</b>