
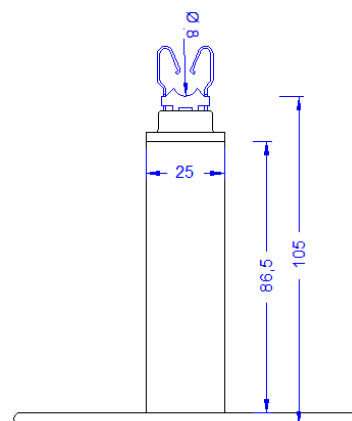
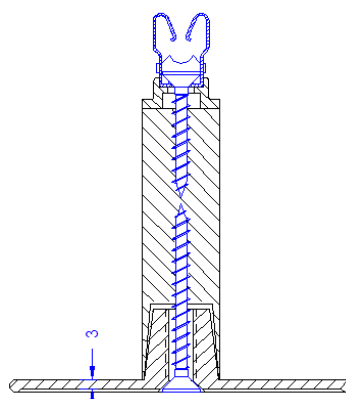
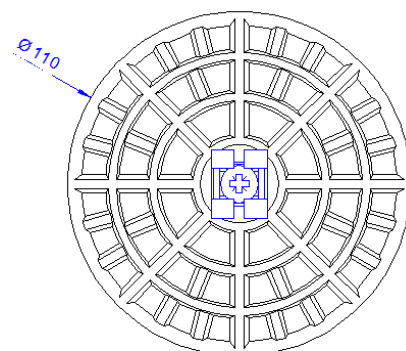
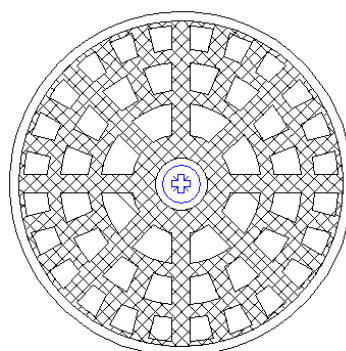


<b>Specification</b>	Adhesive rosette for conductor 8mm. Height 100mm, pivotable stainless steel - holder , for flat roofs, 110mm Ø. Nylon, grey. Weight: 93g
<b>Article No.</b>	46 30 24

**DIN EN62561-4:** „This standard **does not cover** the fixing of conductor fasteners to the fabric/membrane/ gravel roofing of structures due to the vast number and types used in modern day construction.“

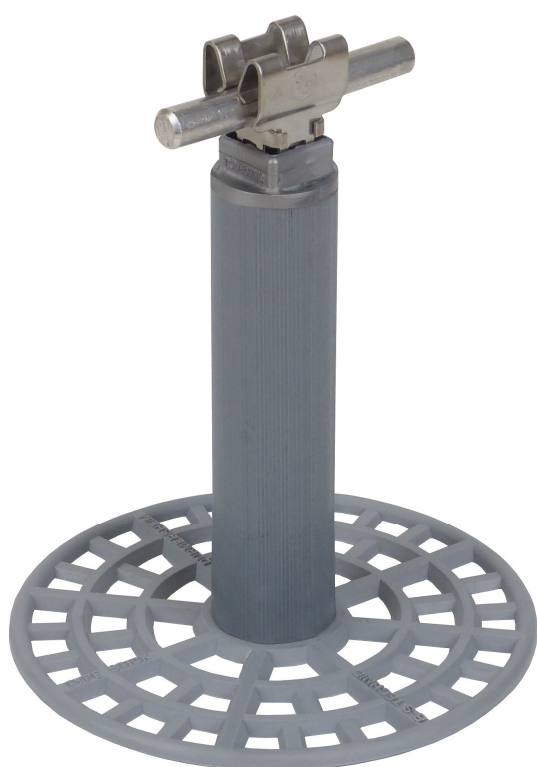

Customs tariff No.: 85389099

Application temperature + 50°C bis -10°C

<b>Description</b>	RoHS2 (Guideline 2011/65/EU) and REACH (Regulation (EG) No.1907/2006): The substance-requirements and all other requirements of this regulations are observed by this product.
<b>Holder</b>	<b>Stainless steel holder for 8mm conductor with a socket out of silver coloured polyamide (UV- and heat stabilized, cold impact resistant. Halogen free).</b>
<b>Bottom plate</b>	<b>Made of polyamide. Colour grey. Cold impact resistant and UV-stabilized to the highest degree. Halogen-free.</b>
<b>Screws (all Stainless steel)</b>	<b>2 x countersunk screw 6mm.</b>
<b>Processing on the roof</b>	<b>To be glued on hot and cold bitumen.</b>