


Specification	Empty Pyramid holdfast for 8mm conductor, with separate bottom. To be filled with concrete. Black. Weight: 100g
Article No.	45 04 16


DIN EN 62561-4:

„The fastening of holders to structures covered with tar paper, membrane and gravel roofs is not treated in the present standard due to the multitude of types which are used on modern constructions.“


Cap



Top

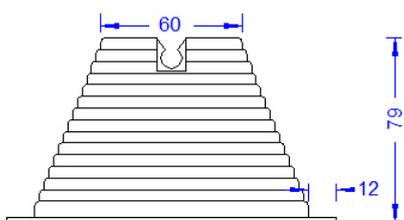


Bottom

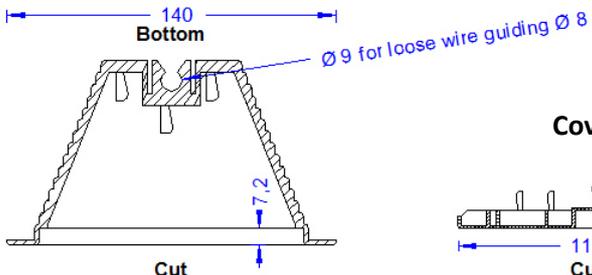


Cut

Cover




Cut

Conductor Height 67



Bottom



Bottom



Customs tariff No.: 85389099

Description	RoHS2 (Guideline 2011/65/EU) and REACH (Regulation (EG) No.1907/2006): The substance-requirements and all other requirements of this regulations are observed by this product.
Input	8 mm conductor
Material of the holdfast	LD-PE regrind, black. No halogens ; UV-stabilized and cold impact resistant.
Material of the bottom	Polypropylen regrind, black. No halogens.