
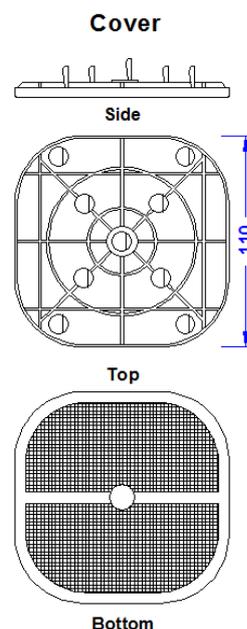


Specification	Empty Pyramid holdfast, with bottom, for round conductor 30 mm (up to 4mm thickness) or round conductor 6-11mm made of Polypropylen. Black. Weight: 103g
Article No.	45 06 16

DIN EN 62561-4:

„The fastening of holders to structures covered with tar paper, membrane and gravel roofs is not treated in the present standard due to the multitude of types which are used on modern constructions.“

For laying lightning protection wires on flat roofs. The holdfast is just placed on the flat roof and holds by its weight.

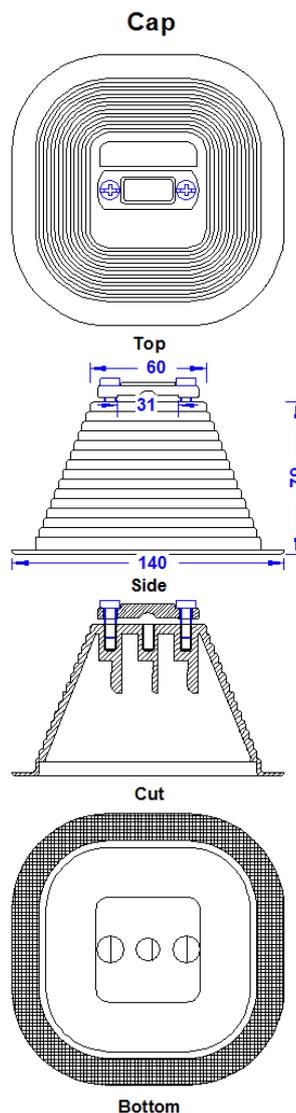

Customs tariff No.: 85389099

Description	RoHS2 (Guideline 2011/65/EU) and REACH (Regulation (EG) No.1907/2006): The substance-requirements and all other requirements of this regulations are observed by this product.
Weight	103g
Input	Flat cond. 30 mm (up to 4mm thickness) or round cond. 6-11mm.
Material of the holdfast	Polypropylen, black. No halogens; UV-stabilized and cold impact resistant. No halogens.
Material of the bottom	Polypropylen, black. No halogens.
Screws	DIN84M6X16 combi-screws, stainless steel.
Material of the saddle	Polyamide, grey UV-stabilized and cold impact resistant. No halogens.