


Specification	Adhesive rosette for cond. 10mm, with pivotable holder, height 100mm for flat roofs, made of nylon, 110mm Ø. Grey. Weight: 85g
Article No.	46 33 17

DIN EN62561-4: „This standard **does not cover** the fixing of conductor fasteners to the fabric/membrane/ gravel roofing of structures due to the vast number and types used in modern day construction.“

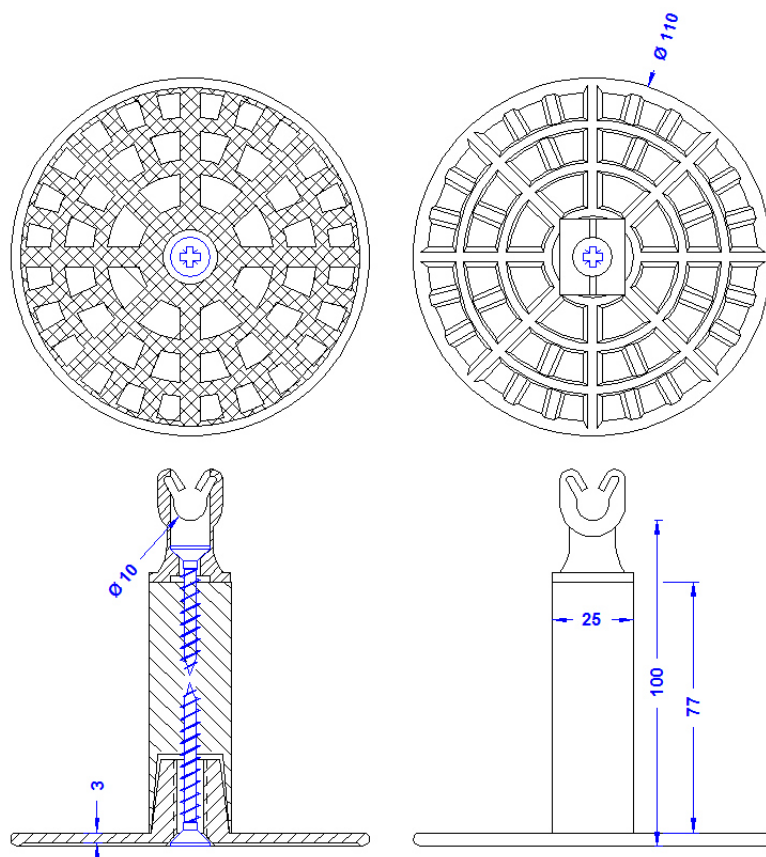

Customs tariff No.: 85389099

Description	RoHS2 (Guideline 2011/65/EU) and REACH (Regulation (EG) No.1907/2006): The substance-requirements and all other requirements of this regulations are observed by this product.
Holder	Duplo-Holder for conductor 8-10mm made of polyamide. Colour RAL7000 (grey). Cold impact resistant and UV-stabilized to the highest degree. Halogen-free.
Screws (all stainless steel)	1 x countersunk head timber screw 6x40, 1 x countersunk head timber screw 6x50.
Spacer	Polyamide-piece GRP-reinforced, 77mm long, grey.
Bottom plate	Made of polyamide. Colour RAL7000 (grey). Cold impact resistant and UV-stabilized to the highest degree. Halogen-free.
Processing on the PVC membrane roof	To be glued on hot and cold bitumen.