


<b>Specification</b>	<b>Multi-purpose clamp for 8-10mm conductor. Hot dip galvanized steel. Thread in the lower part. Reference Standard: DIN EN 62561-1 Weight: 100g</b>
<b>Article No.</b>	<b>42 04 40</b>

Customs tariff number.: 85389099

**This product is build to stand a current of 100 kA.**

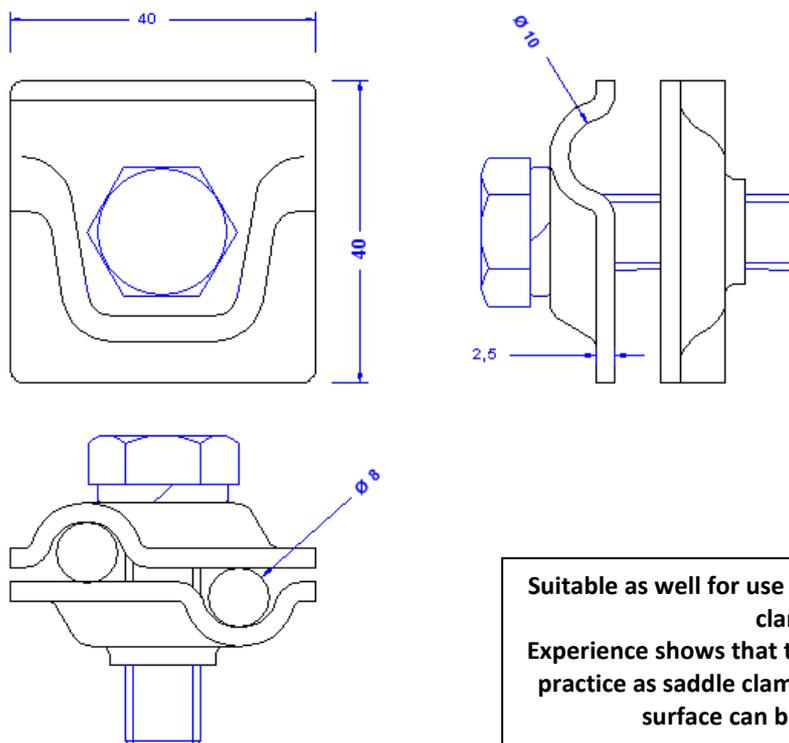

**Suitable as well for use as T-, parallel and cross-clamp. Experience shows that this clamp is also used in practice as saddle clamp if a sufficient contact surface can be guaranteed.**

<b>Description</b>	RoHS2 (Guideline 2011/65/EU) and REACH (Regulation (EG) No.1907/2006): The substance-requirements and all other requirements of this regulations are observed by this product.
<b>Material of the clamp</b>	<b>Steel, Hot dip galv. in compliance with DIN EN ISO 1461.</b>
<b>Conductor leading</b>	<b>2 x 8mm conductor parallel or crosswise.</b>
<b>Screw connection (all stainless steel)</b>	<b>Screw: DIN933M10X35, Spring washer: 10mm</b>
<b>Remarks</b>	<b>Upper part of the clamp with a square hole 11x11mm. Lower part with a thread M10.</b>