


Specification	Insulating mast, 6,0m long 50mm \varnothing , Insulating mast 4,5m aluminum tube without tip, for completion. System weight: 11,7 kg
Article-No.	68 24 07

Customs tariff No.: 85389099

Transport length: 4,5m

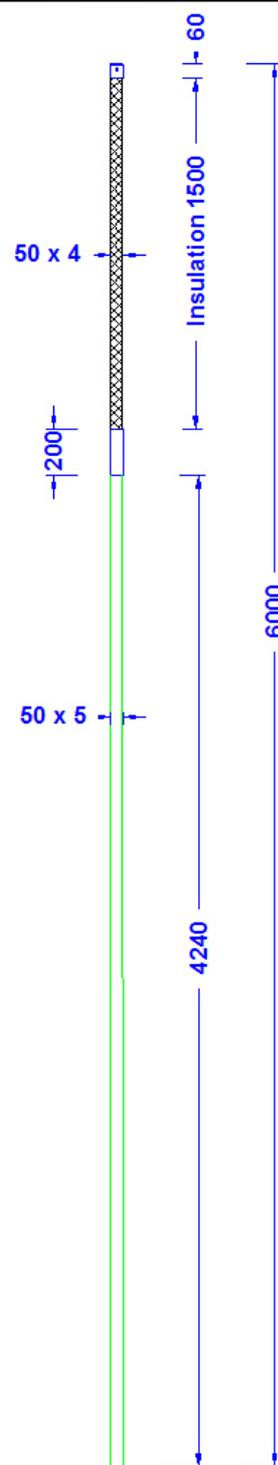

Description	
Sleeve for take-up of the tip	Stainless steel tube 1-4301 with 54,5mm \varnothing and 60mm length. Riveted and screwed together.
Mast – upper part	1,5m GRP tube 50mm \varnothing , light grey, UV-stabilized with 5mm wall thickness, made of polyester UD.
Conncting sleeve	Stainless steel tube 1-4301 with 54,5mm \varnothing and 200mm length. Riveted and screwed together.
Mast – lower part	Aluminum tube 50mm \varnothing , 4240 mm long. Pluggable, screw-fixed.
Screws/nuts/rivets/spring washers (all stainless steel)	2 x DIN603M8X16; 1 x DIN933M8X10/ 1 x DIN934M10 / 2 x blind rivet 4x6 ; 2 x blind rivet 6x12 / 3 x spring washer 8mm