

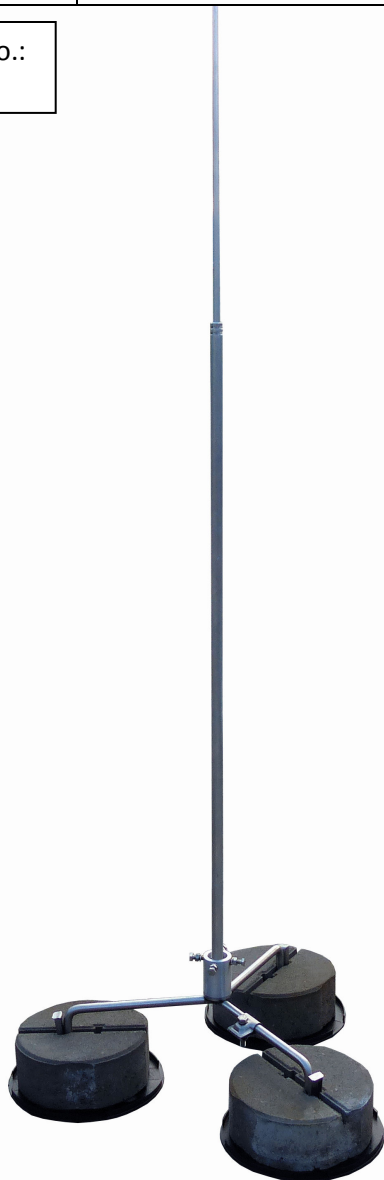


<b>Specification</b>	Aluminum air termination rod with welded galvanized steel tripod for three concrete bases 8,5 kg. Height of the air termination rod: 2,0m. Weight: 3,5 kg (without concrete bases) <b>Calculated for wind speed zones I – IV</b> <b>For ground category III - IV</b>
<b>Article No.</b>	<b>48 62 90</b>

Customs tariff No.:  
85389099

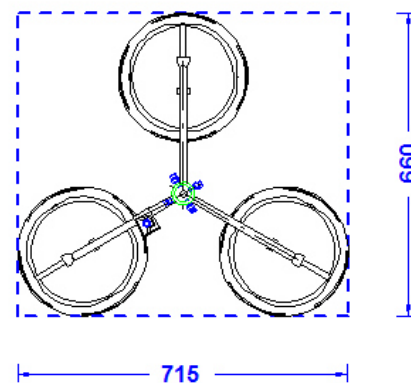

The concrete bases and the protective pads are not part of the product.

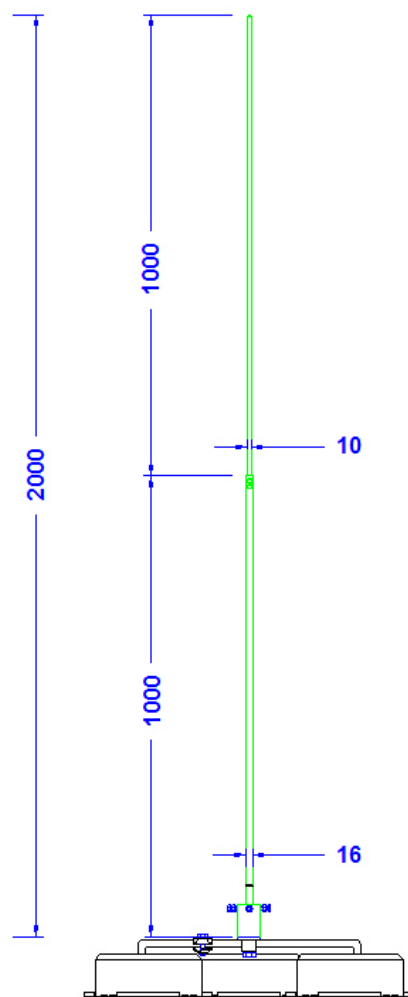

Description	Ø	Material	Lengt	Wind speed zone	Remarks
<b>Air termination rod</b>	1,0m 16mm 1,0m 10mm	Aluminium	3,5m	Wind speed zone I-IV for ground category III – IV ((accord. to Euro Code 1 as well as DIN EN 1991 and DIN EN 1993. At 1,5-fold safety) with maximum gust velocity 175 km/h. Applicable for building heights below 40m und area heights below 600m above NN. Higher buildings or areas as well as icing and self-oscillation are to be considered separately if necessary.	<ol style="list-style-type: none"> <li>All connections are made of stainless steel V2A.</li> <li>The concrete bases and the respective protective pads are not part of the product.</li> <li>System-weight including the concrete bases: 30 kg.</li> <li>Surface loading rate: 30 kg/m<sup>2</sup></li> <li>Terminal clamp 8-10mm made of stainl.steel, attached.</li> <li>Technical changes reserved.</li> </ol>
<b>Stand segments</b>		Steel round 16mm Ø, hot dip galvan.			
<b>Stand central tube</b>	40mm outside-Ø for rods 16mm Ø	Aluminum with four stainl.steel adjustment screws	55mm		