



Specification	Aluminum air termination rod with welded galvanized steel tripod for three concrete bases 8,5 kg. Height of the air termination rod: 2,5m. Calculated for wind speed zones I – IV For ground category III - IV
Article No.	48 62 91
Customs tariff No.:	85389099

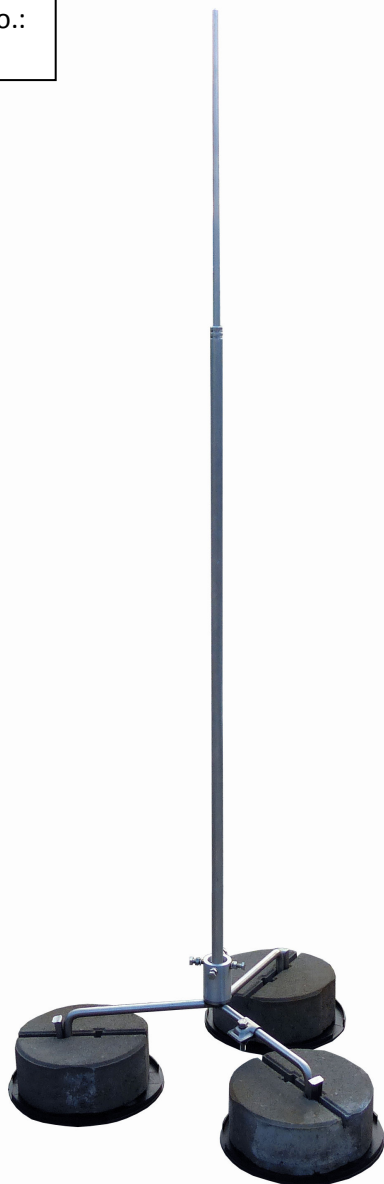

The concrete bases and the protective pads are not part of the product.

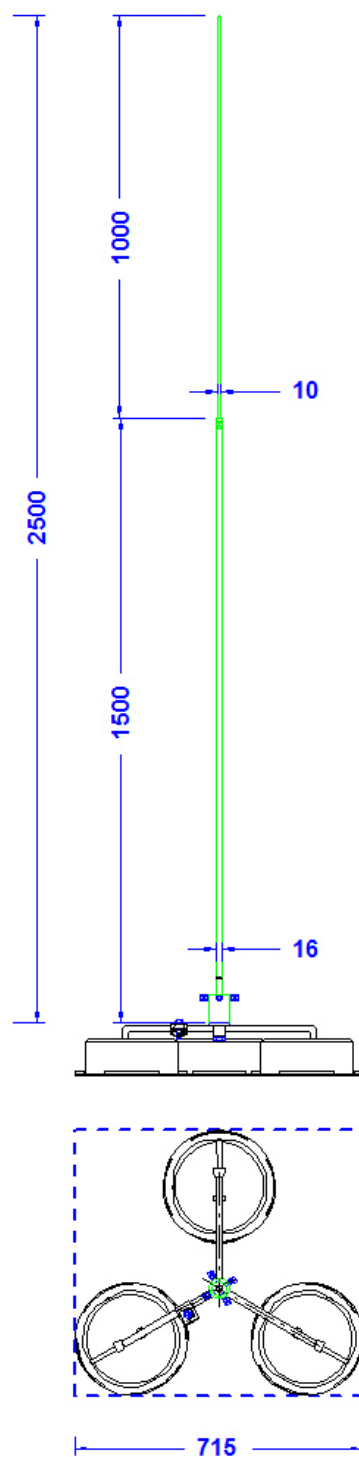

Description	Ø	Material	Lengt	Wind speed zone	Remarks
Air termination rod	1,5m 16mm 1,0m 10mm	Aluminium	3,5m	Wind speed zone I-IV for ground category III – IV ((accord. to Euro Code 1 as well as DIN EN 1991 and DIN EN 1993. At 1,5-fold safety) with maximum gust velocity 175 km/h. Applicable for building heights below 40m und area heights below 600m above NN. Higher buildings or areas as well as icing and self-oscillation are to be considered separately if necessary.	<ol style="list-style-type: none"> All connections are made of stainless steel V2A. The concrete bases and the respective protective pads are not part of the product. System-weight including the concrete bases: 30 kg. Surface loading rate: 30 kg/m² Terminal clamp 8-10mm made of stainl.steel, attached. Technical changes reserved.
Stand segments		Steel round 16mm Ø, hot dip galvan.			
Stand central tube	40mm outside-Ø for rods 16mm Ø	Aluminum with four stainl.steel adjustment screws	50mm		