



| | |
|----------------------|---|
| Specification | Metal-roof -conductor-holder for 6-10mm Ø conductor. Conductor distance 40mm, with clamping bock, for Kalzip-roof with 20-25mm Ø bead. Screw connections in stainless steel. Aluminum. Weight: 110g Reference Standard: DIN EN 62561-1 |
| Article No. | 51 21 30 |


Customs tariff No.: 85389099

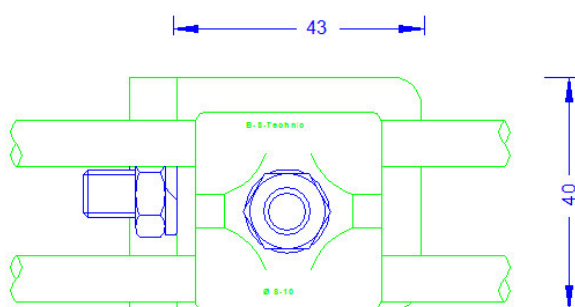

Top

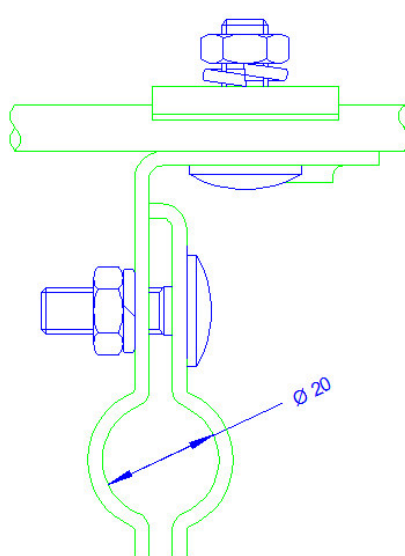

Side

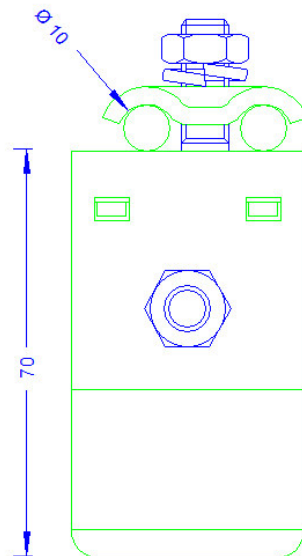

Front

| | |
|---|--|
| Description | RoHS2 (Guideline 2011/65/EU) and REACH (Regulation (EG) No.1907/2006): The substance-requirements and all other requirements of this regulations are observed by this product. |
| Material of the clamp Screws/Nuts (all stainless steel)) Clamping for Flat-roof-form Conductor leading | Aluminium 2 x DIN603M8X25/ 2 x DIN934M8. Kalzip-roof, bead 20-25mm Ø 6-10mm |