

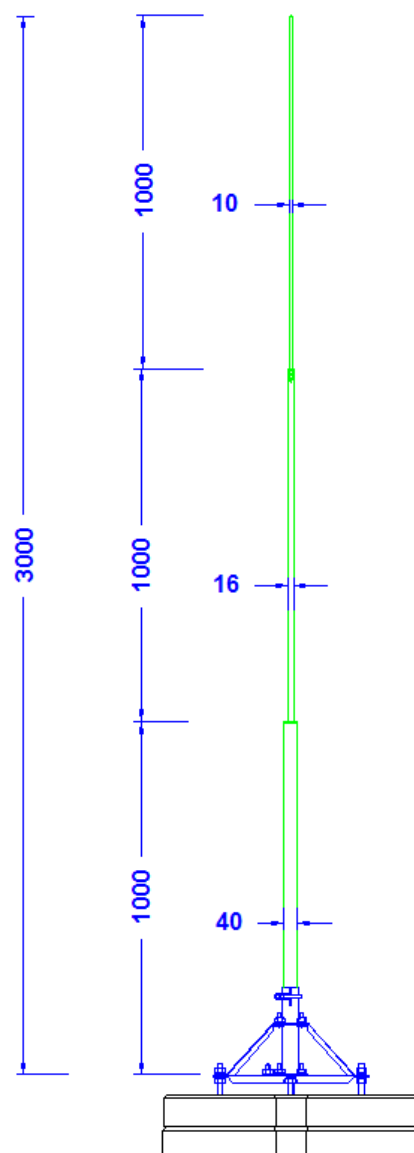


|                      |  |
|----------------------|--|
| <b>Specification</b> | Aluminum air termination mast with a 3-leg support made of stainless steel and 3 threaded pieces made of stainl. steel to be fixed on the concrete bases. Height of the mast: 3,0m.<br>Gewicht: 7,0 kg; Systemgewicht: 110 kg<br><b>For wind speed zones III – IV</b><br><b>For ground category III- IV (175 km/h)</b> |
| <b>Article No.</b>   | <b>48 37 36</b>  |

Customs tariff No.: 85389099

Transport length: 2m

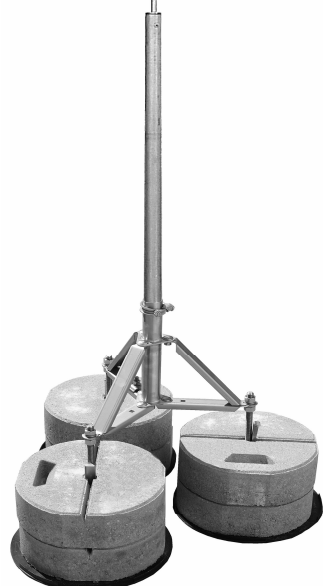

| Description                               | Ø                | Material               | Length | Wind speed zone  | Remarks  |
|---|------------------|------------------------|--------|--|--|
| <b>Mast main tube</b>                     | 40mm             | Aluminium tube         | 1,0m   | Wind speed zone III-VI for ground category III - IV (accord. to Euro Code 1 as well as DIN EN 1991 and DIN EN 1993. At 1,5-fold safety).<br>Applicable for building heights below 40m and area heights below 600m above NN.<br>Higher buildings or areas as well as icing and self-oscillation are to be considered separately if necessary. | 1. All connections are made of stainless steel.<br>2. The concrete bases and the respective protective pads are not part of the product.<br>3. System-weight including the concrete bases: 110 kg.<br>4. Surface loading rate: 110 kg/m <sup>2</sup><br>5. Transport length: 2,0 m |
| <b>Mast tip</b>                           | 1m 16mm, 1m 10mm | Aluminium rods         | 2 x 1m |  |  |
| <b>Stand segments</b>                     |                  | Stainless steel        |        |  |  |
| <b>Stand central tube</b>                 | 45,0mm           | Stainless steel tube   | 250mm  |  |  |
| <b>Threaded pieces for concrete bases</b> | 16mm             | Stainless steel 1.4301 | 300mm  |  |  |