


<b>Specification</b>	Aluminum air termination mast with 3- leg folding support made of stainl. steel and 3 threaded pieces made of stainl. steel to be fixed on concrete bases. Height of the air termination mast: 3,0m. Weight: 6,3 kg For wind speed zones I – II For ground category III- IV (max. gust speed 145 km/h)
<b>Article No.</b>	<b>48 45 01</b>

Customs tariff No.:  
85389099

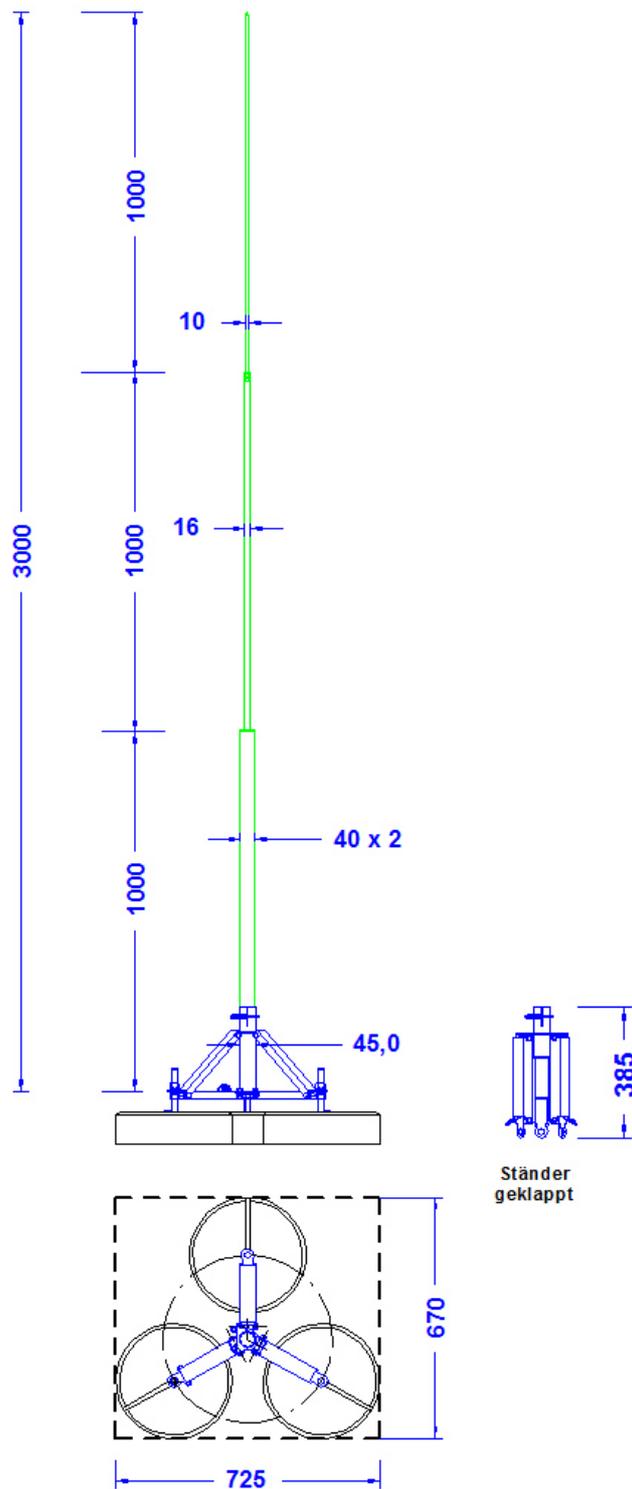

Description	∅	Material	Length	Wind speed zone	Remarks
Mast main tube	40mm	Aluminium tube 40x5mm	1m	Wind speed zone I-II (accord. to Euro Code 1 as well as DIN EN 1991 and DIN EN 1993. At 1,5-fold safety). Applicable for building heights below 40m and area heights below 600m above NN. Higher buildings or areas as well as icing and self-oscillation are to be considered. separately if necessary.	<ol style="list-style-type: none"> <li>All connections are made of stainless steel V2A.</li> <li>The concrete bases and the respective protective pads are not part of the product.</li> <li>System-weight including the concrete bases: 57 kg.</li> <li>Surface loading rate: 57 kg/m<sup>2</sup></li> <li>Transport length: 2,10m</li> </ol>
Mast tip	1m 16mm, 1m 10mm	Aluminium-rods	2 x 1m		
Stand segments		Stainless steel 1.4301			
Stand central tube	45,0mm	Stainless steel tube 1.4301	250mm		
Threaded rods for concrete bases	16mm	Stainless steel 1.4301	200mm		