
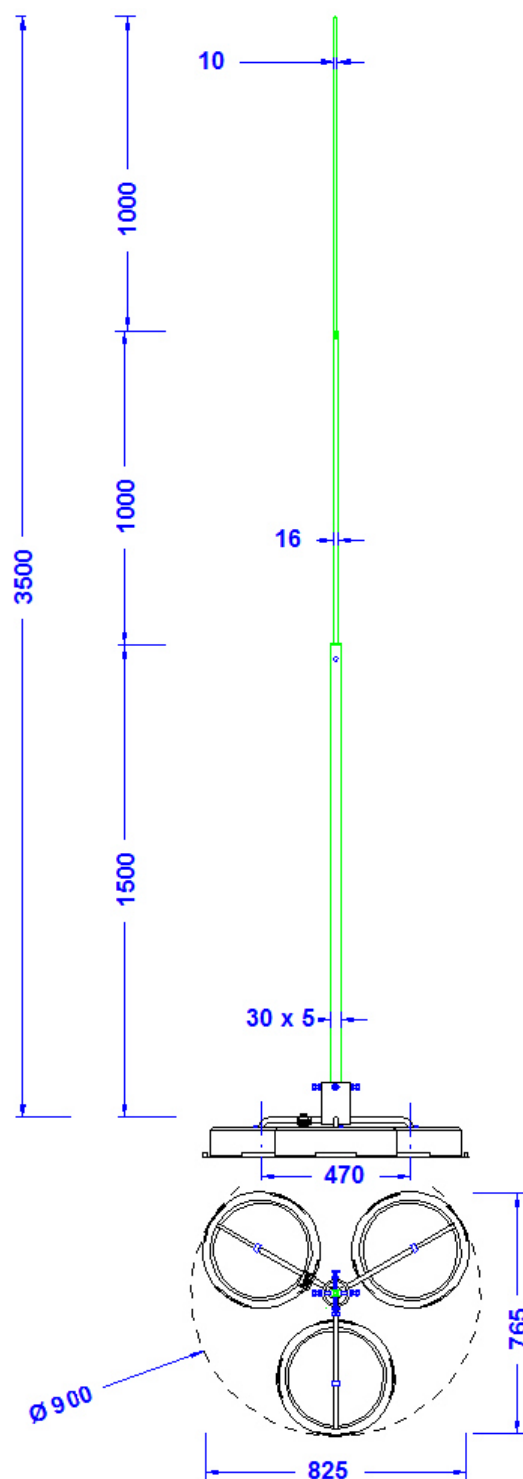


<b>Specification</b>	Aluminum air termination mast with welded tripod out of hot dip galvanized steel for three concrete bases 17 kg. Height of the air termination mast : 3,5m. Weight: 8 Kg <b>Calculated for wind speed zones I – II For ground category III - IV (max. gust speed 145 km/h)</b>
<b>Article No.</b>	<b>48 53 52</b>

Customs tariff No.: 85389099
---------------------------------

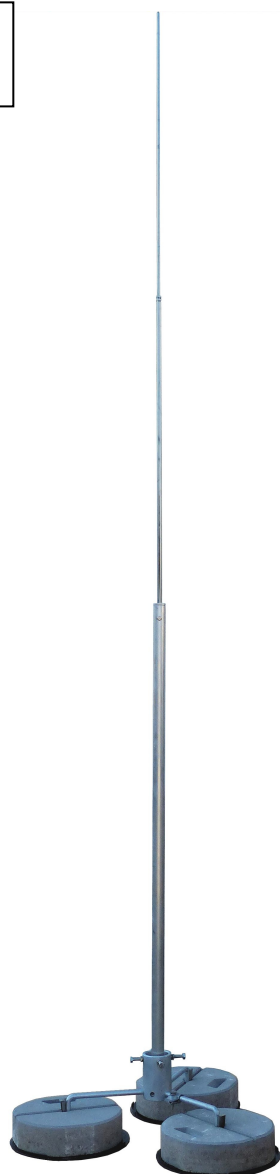

Description	Ø	Material	Length	Wind speed zone	Remarks
<b>Mast main tube</b>	30mm	Aluminium tube 30x5mm	1,5m	Wind speed zone I-II for ground category III – IV ((accord. to Euro Code 1 as well as DIN EN 1991 and DIN EN 1993. At 1,5-fold safety) Applicable for building heights below 40m und area heights below 600m above NN. Higher buildings or areas as well as icing and self-oscillation are to be considered separately if necessary.	<ol style="list-style-type: none"> <li>All connections are made of stainless steel 1.4301.</li> <li>The concrete bases and the respective protective pads are not part of the product.</li> <li>System-weight including the concrete bases: 59,0 kg.</li> <li>Surface loading rate: 60 kg/m<sup>2</sup></li> <li>Terminal clamp 8-10mm made of stainl.steel, attached.</li> <li>Technical changes reserved.</li> </ol>
<b>Mast tip</b>	1m 16mm, 1m 10mm	Aluminum rods	2 x 1,0m		
<b>Stand segments</b>		Steel rods out of hot dip galvanized steel 16mm Ø			
<b>Stand central tube</b>	88,9 mm	Steel rods 88,9 x 8,0mm hot dip galvanized	135mm		