


<b>Specification</b>	Aluminum air termination mast with a 3-leg support made of stainless steel and 3 threaded pieces made of stainl. steel to be fixed on the concrete bases. Height of the mast: 3,5m. Weight: 7,0 kg; System weight: 110 kg <b>For wind speed zones I – II</b> <b>For ground category III- IV</b> <b>(145 km/h)</b>
<b>Article No.</b>	<b>48 38 02</b>

Customs tariff No.: 85389099

Transport length: 2,5m

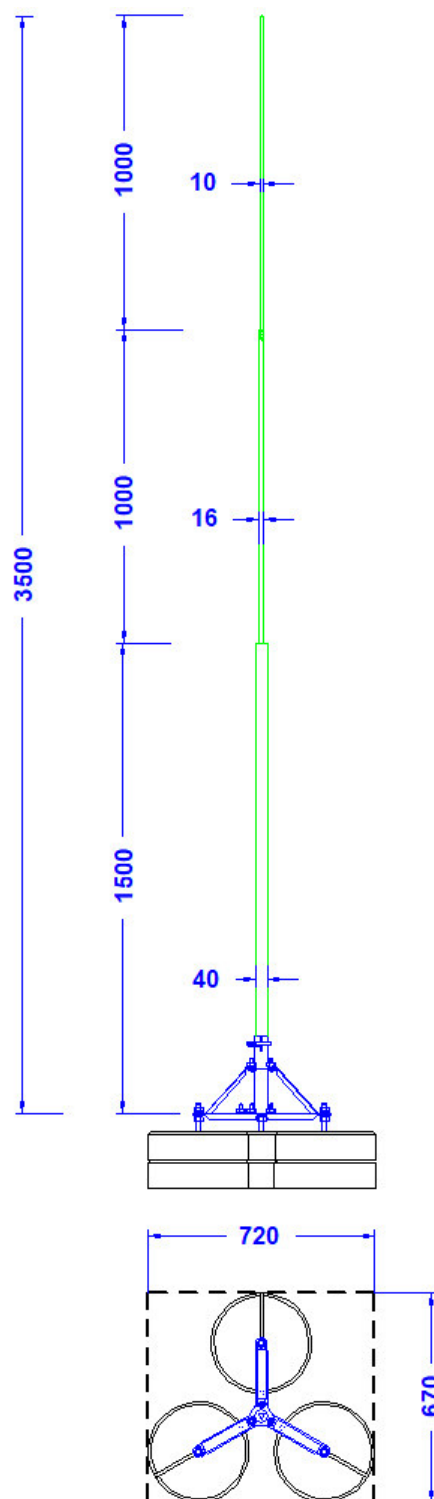

Description	Ø	Material	Lenght	Wind speed zone	Remarks
Mast main tube	40mm	Aluminium tube	1,5m	Wind speed zone I-II for ground category III - IV (accord. to Euro Code 1 as well as DIN EN 1991 and DIN EN 1993. At 1,5-fold safety). Applicable for building heights below 40m and area heights below 600m above NN. Higher buildings or areas as well as icing and self-oscillation are to be considered separately if necessary.	1. All connections are made of stainless steel.
Mast tip	1m 16mm, 1m 10mm	Aluminium rods	2 x 1m		2. The concrete bases and the respective protective pads are not part of the product.
Stand segments		Stainless steel			3. System-weight including the concrete bases: 110 kg.
Stand central tube	45,0mm	Stainless steel tube	250mm		4. Surface loading rate: 110 kg/m²
Threaded pieces for concrete bases	16mm	Stainless steel 1.4301	300mm		5. Transport length: 2,5 m