
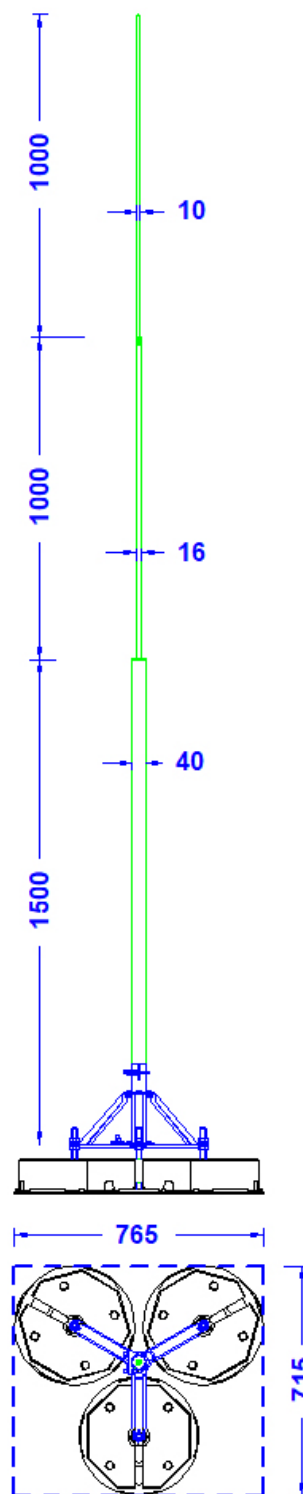


Specification	Aluminum air termination mast with a 3-leg support made of stainless steel and 3 threaded pieces made of stainl. steel to be fixed on the concrete bases. Height of the mast: 3,5m. Weight: 7,0 kg; System weight: 60 kg For wind speed zones I – II For ground category III- IV (145 km/h)
Article No.	48 38 02

Customs tariff No.: 85389099

Transport length: 2,0m

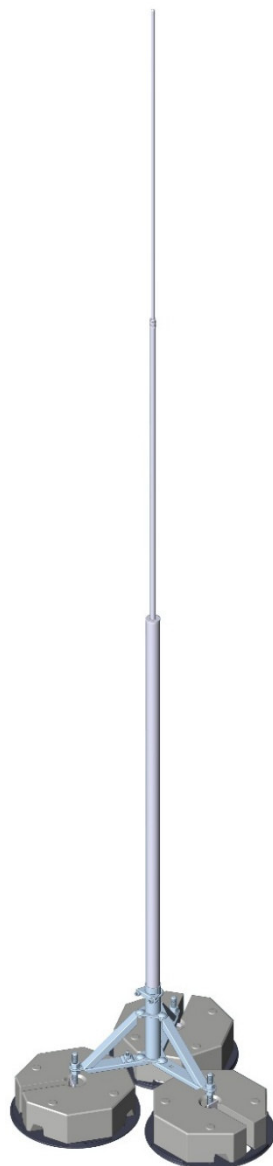

Description	Ø	Material	Lenght	Wind speed zone	Remarks
Mast main tube	40mm	Aluminium tube	1,5m	Wind speed zone I-II for ground category III - IV (accord. to Euro Code 1 as well as DIN EN 1991 and DIN EN 1993. At 1,5-fold safety). Applicable for building heights below 40m and area heights below 600m above NN. Higher buildings or areas as well as icing and self-oscillation are to be considered separately if necessary.	<ol style="list-style-type: none"> All connections are made of stainless steel. The concrete bases and the respective protective pads are not part of the product. System-weight including the concrete bases: 60 kg. Surface loading rate: 60 kg/m² Transport length: 2,0 m
Mast tip	1m 16mm, 1m 10mm	Aluminium rods	2 x 1m		
Stand segments		Stainless steel			
Stand central tube	45,0mm	Stainless steel tube	250mm		
Threaded pieces for concrete bases	16mm	Stainless steel 1.4301	300mm		